

Huzhou Charming Lighting Co., Ltd.

Jiacheng high-tech zone, Qixing road, Wuxing, Huzhou, Zhejiang, China

Tel: (86) 18006626989 | Email: feng@charming-tech.cn



100-10A



- ◆ Chip: Epistar SMD/Bridgelux
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Aluminum cover, Aluminum body, Tempered glass (Clear/Frosted), ABS box
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz



1



2



3



4



5



Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
100-10A	3W	Φ95*H85mm	0.4kg	56*34*25cm/30pcs



130-2T



1



2



3



4

Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
130-2T	3W/6W COB	Φ125*H110mm	0.8kg	44*29.5*30cm/12pcs



150-4T



10W COB



1




2



3

Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
150-4T	3W/10W COB	Φ145*H145mm	1.2kg	46*32*33cm/12pcs

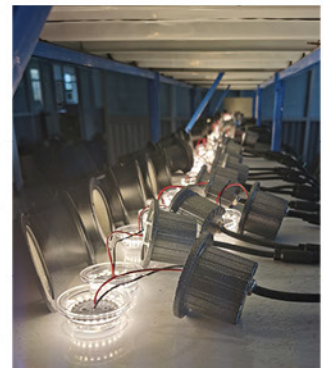

Huzhou Charming Lighting Co., Ltd.

Jiacheng high-tech zone, Qixing road, Wuxing, Huzhou, Zhejiang, China


Tel: (86) 18006626989 | Email: feng@charming-tech.cn



1-12 Way Bezel Recessed Inground Lights



100J



- Chip: Epistar SMD/Bridgelux
- CCT: 3000K /4000K /6000K/R/G/B
- Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- Input Voltage: 12V/24V/110-240V 50-60Hz



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
100J	110	110	3W	Φ105*H100mm	1kg	36*36*28cm/18pcs
130J	130	130	6W	Φ120*H110mm	1.5kg	36*36*28cm/18pcs
150J	150	150	10W	Φ145*H145mm	2.4kg	36*36*28cm/18pcs



1



2



3



4





5



6



200J-1T



Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
200J	One side:4W Two side:8W	Φ195*H165mm	3.5kg	44*23*36cm/4pcs