




Adjustable on Panel Recessed Inground lights



T821



- ◆ Chip: Epistar/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz





Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle (Reflector/Lens)
	Φ	H					
T832	320	340	24x2W/50W COB	φ 305xH350mm	10.1	37.5x37.5x40.5CM/1PCS	6° / 15° / 30° / 45° / 60°
T826	260	270	18x2W/30W COB	φ 250xH280mm	7.25	64x33x33CM/2PCS	6° / 15° / 30° / 45° / 60°
T823	230	240	15x2W/20W COB	φ 220xH250mm	5	57x30x31/2PCS	6° / 15° / 30° / 45° / 60°
T821	210	246	12x2W/20W COB	φ 200xH256mm	4.6	53x53x31CM/4PCS	6° / 15° / 30° / 45° / 60°
T818	180	190	9x2W/10W COB	φ 170xH200mm	3	48x48x26CM/4PCS	6° / 15° / 30° / 45° / 60°
T815	150	165	3x2W/5W COB	φ 140xH175mm	1.8	49x33x37CM/12PCS	6° / 15° / 30° / 45° / 60°
T813	130	140	1x3W /3W COB	φ 120xH150mm	1.4	53x36x38CM/10PCS	6° / 15° / 30° / 45° / 60°
T810	100	115	1x3W /3W COB	φ 90xH120mm	0.85	55.5x34x26.5CM/30PCS	6° / 15° / 30° / 45° / 60°




W320C



W320



- ◆ Chip: Epistar/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover,Aluminum body,Tempered glass(Clear/Frosted)ABS box
- ◆ Input Voltage: 12V/24V/110–240V 50–60Hz

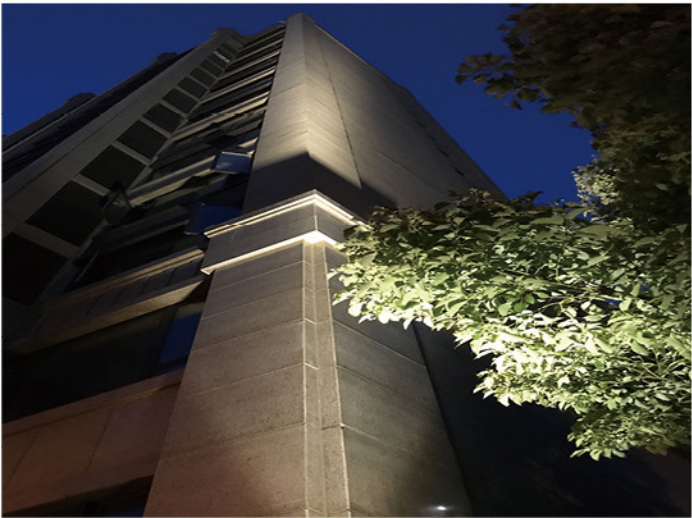

Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
W320C	320	340	50WCOB	φ 295xH350mm	9.58	37.5x37.5x40.5CM/1PCS	30°
W320	320	340	50W	φ 295xH350mm	9.76	37.5x37.5x40.5CM/1PCS	6° / 15° / 30°