




LED Recessed Driveover Inground Lights



210S




- ◆ Chip: CREE XPE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass
(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz




Cable Moisture
Insulation Kit






Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
100S	100	130	3x2W	Φ92*H140	0.85	45*45*35.5cm/18pcs	6° /15° /30° /45° /60°
130S	130	130	6x2W	Φ121*H135	1.3	53*36*35.5cm/12pcs	6° /15° /30° /45° /60°
160S	160	140	9x2W	Φ145*H145	2	40*40*38/8pcs	6° /15° /30° /45° /60°
180S	180	145	12x2W	Φ167*H150	2.5	51.5*35*48cm/8pcs	6° /15° /30° /45° /60°
210S	210	130	18x2W	Φ195*H140	2.7	52.5*27*35.5cm/4pcs	6° /15° /30° /45° /60°
260S	260	155	24x2W	Φ241*H160	5.2	66.5*34*46.5cm/4pcs	6° /15° /30° /45° /60°

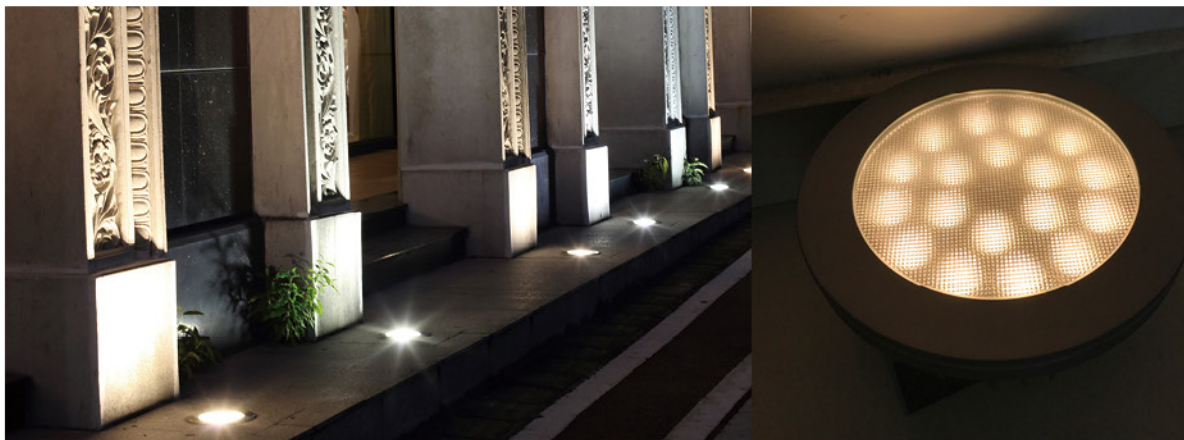



- ◆ Chip: OSRAM
- ◆ CCT: 3000K/4000K/6000K/RGB
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted), ABS box
- ◆ Input Voltage: DC12V/DC24V



Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
2210	100	50	3x1W	Φ94*H56	0.42	44.5x23x19.5cm/24pcs	10° /15° /30° /45° /60°
2213	130	50	6x1W	Φ124*H56	0.69	43x29x19.5cm/18pcs	10° /15° /30° /45° /60°
2216	160	50	9x1W	Φ150*H56	0.97	35x35x19.5cm/12pcs	10° /15° /30° /45° /60°
2221	210	50	18x1W	Φ196*H56	1.69	45x45x19.5cm/12pcs	10° /15° /30° /45° /60°
2226	260	50	24x1W	Φ245*H56	2.57	54x28x25cm/8pcs	10° /15° /30° /45° /60°




LED Recessed Driveover Inground Lights



320

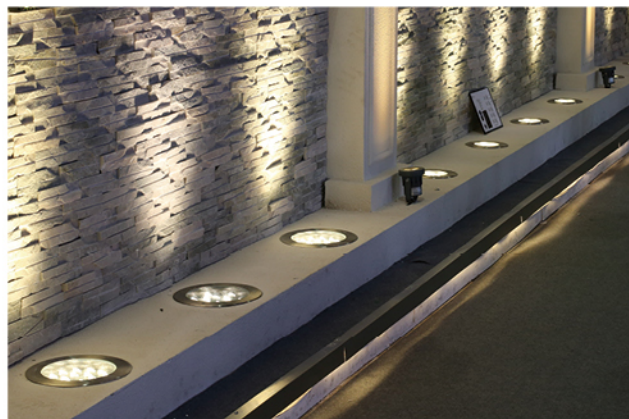

- ◆ Chip: Bridgelux/CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/ Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz




Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
85	85	98	3W	Φ80*H105	0.55kg	56*34*25cm/30pcs	15° /30° /45° /60°
100	100	108	3W	Φ90*H115	0.7kg	56*23*25cm/20pcs	15° /30° /45° /60°
130	130	98	5W/6W	Φ120*H105	0.96kg	43*29*36cm/18pcs	15° /30° /45° /60°
160	160	110	6W/7W/9W	Φ145*H115	1.6kg	52*35.5*26.5cm/12pcs	15° /30° /45° /60°
180	180	125	9W/12W	Φ170*H135	1.8kg	39*39*28.5cm/8pcs	15° /30° /45° /60°
210	210	120	12W/15W/18W	Φ200*H130	2.44kg	45*45*28.5cm/8pcs	15° /30° /45° /60°
230	230	140	15W/18W	Φ220*H150	3kg	48.5*25*45/6pcs	15° /30° /45° /60°
260	260	125	18W/24W	Φ250*H135	3.7kg	54*28*42/6pcs	15° /30° /45° /60°
320	320	115	36W	Φ300*H120	5.6kg	67*35*24.5cm/4pcs	15° /30° /45° /60°



100C



- ◆ Chip: Bridgelux/CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover,Aluminum body,Tempered glass(Clear/
Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
85C	85	98	3W	Φ80*H105	0.5	56*34*25cm/30pcs	120°
100C	100	108	3W	Φ90*H115	0.68	56*23*25cm/20pcs	120°
130C	130	98	5W	Φ120*H105	0.9	43*29*36cm/18pcs	120°
160C	160	110	10W	Φ145*H115	1.45	52*35.5*26.5cm/12pcs	120°
180C	180	125	15W	Φ170*H135	1.68	39*39*28.5cm/8pcs	120°
210C	210	120	20W	Φ200*H130	2.2	45*45*28.5cm/8pcs	120°
230C	230	140	30W	Φ220*H150	2.8	48.5*25*45/6pcs	120°
260C	260	125	30W	Φ250*H135	3.25	54*28*42/6pcs	120°
320C	320	115	40W	Φ300*H120	4.87	67*35*24.5cm/4pcs	120°



LED Recessed Driveover Inground Lights




180G



- ◆ Chip: CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass
(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz

Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
85G	85	98	3W	Φ80*H105	0.5	56*34*25cm/30pcs	10° /20°
100G	100	108	5W	Φ90*H115	0.7	56*23*25cm/20pcs	10° /20°
130G	130	98	7W	Φ120*H105	0.97	43*29*36cm/18pcs	10° /20°
160G	160	110	12W	Φ145*H115	1.59	52*35.5*26.5cm/12pcs	10° /20° /30°
180G	180	125	15W	Φ170*H135	1.87	39*39*28.5cm/8pcs	10° /20° /30°
210G	210	120	20W	Φ200*H130	2.3	45*45*28.5cm/8pcs	10° /20° /30°
230G	230	140	30W	Φ220*H150	3	48.5*25*45/6pcs	10° /20° /30°
260G	260	125	30W	Φ250*H135	3.64	54*28*42/6pcs	10° /20° /30°



- ◆ Chip: Epistar/CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/ Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz

120D



Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
100D	100	145	7W	Φ95*H155	0.83	53*22*32cm/20pcs	15° /38° /60°
120D	120	98	3W/5W	Φ105*H100	0.75	43*29*36cm/18pcs	15° /24° /60°
150D	150	115	10W	Φ135*H125	1.34	52*35.5*26.5cm/12pcs	15° /24° /60°
180D	180	125	15W	Φ170*H130	1.96	39*39*28.5cm/8pcs	15° /24° /38° /60°




LED Recessed Driveover Inground Lights



180J





- ◆ Chip: CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
120J	120	98	3W	Φ105*H100	0.8	43*29*36cm/18pcs	10° /20°
150J	150	115	10W	Φ135*H125	1.5	52*35.5*26.5cm/12pcs	10° /20°
180J	180	125	15W	Φ170*H130	2.1	39*39*28.5cm/8pcs	10° /20° /30°

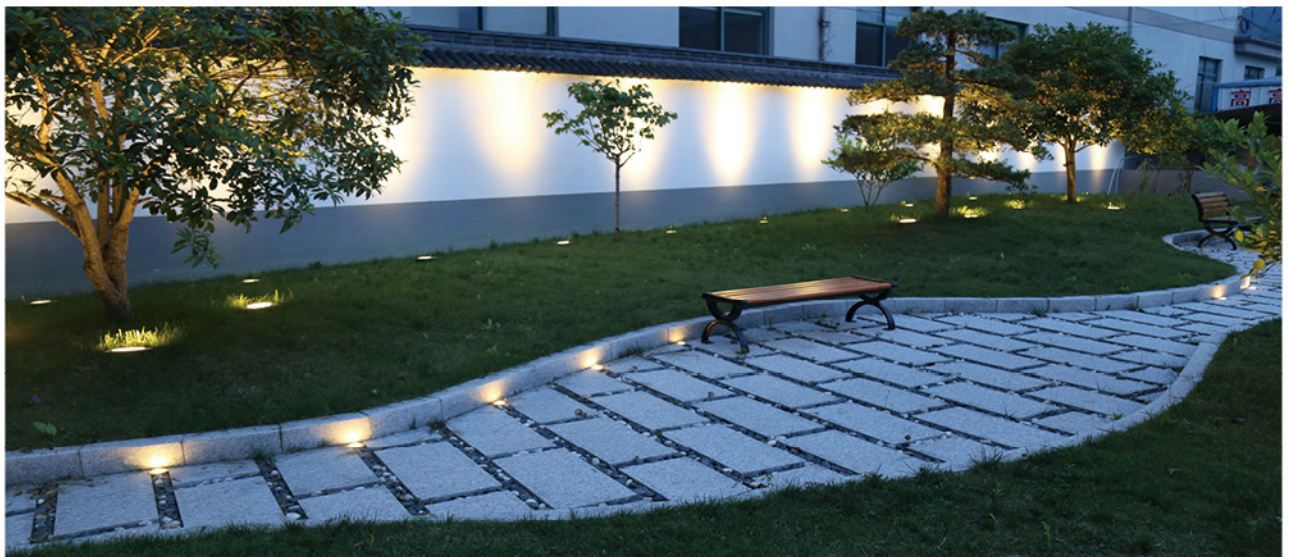

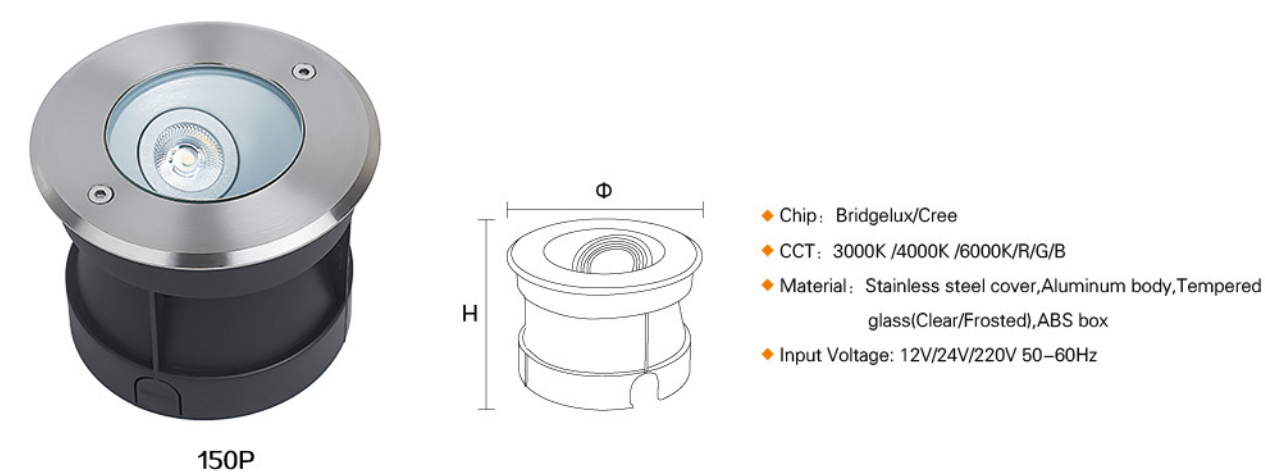

Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
120P	120	98	3W	Φ105*H100	0.76kg	43*29*36cm/18pcs
150P	150	115	7W	Φ135*H125	1.33kg	52*35.5*26.5cm/12pcs
180P	180	125	3x2W	Φ170*H130	1.9kg	39*39*28.5cm/8pcs







LED Recessed Driveover Inground Lights




180X

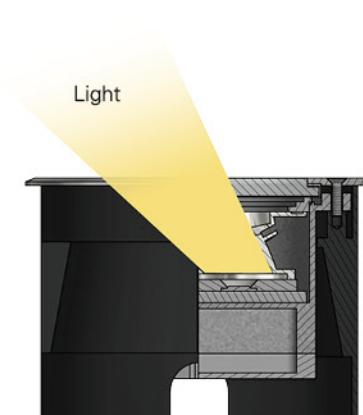

- ◆ Chip: Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



270P



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
180X	180	125	15W	Φ 170*H130	1.9kg	39*39*28.5cm/8pcs
270P	270	195	40W	Φ 245*H205	4.8kg	54*28*42.5cm/4pcs