







LED Mini Recessed Lights

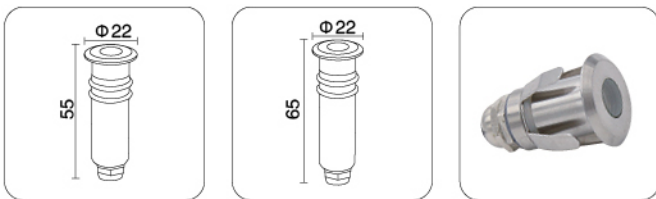

Technical Parameter

Model	N-15	N-15L	N-20
Size	Φ22*H55mm	Φ22*H65mm	Φ22*H35mm
Rated Power	0.3W	0.3W	0.3W
Input Voltage	DC12V/24V		
Hole Size	Φ18*H65mm	Φ18*H75mm	Φ18*H50mm
N.W/G.W	0.05kg	0.075kg	0.03kg
Packing Size	30.5*30.5*18cm/50pcs		



Technical Parameter


Model	N-10	N-30
Size	Φ10*H40mm	Φ30*H52mm
Rated Power	0.1W	0.6W
Input Voltage	DC12V	DC12V/24V
Hole Size		D27*H47mm
N.W/G.W	0.02kg/0.05kg	0.13kg/0.16kg
Packing Size	30.5*30.5*18cm/100pcs	30.5*30.5*18cm/50pcs



- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass
or PC cover, ABS box


Technical Parameter

Model	N-301	N-301A	N-302	N-303
Size	Φ30*H88mm			
Rated Power	0.6W			
Input Voltage	DC12V/24V			
Hole Size	D27*H47mm			
N.W/G.W	0.15kg/0.18kg			
Packing Size	30.5*30.5*18cm/50pcs			

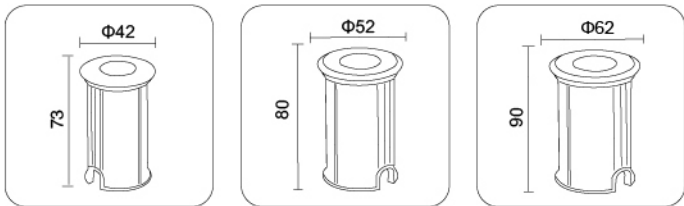

Technical Parameter

Model	42	52	62
Size	Φ42*H73mm	Φ52*H80mm	Φ62*H90mm
Rated Power	1W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ40*H75mm	Φ48*H85mm	Φ55*H95mm
N.W/G.W	0.2kg/0.23kg	0.25kg/0.28kg	0.35kg/0.38kg
Packing Size	30.5*30.5*18cm/50pcs	33.5*33.5*21.5cm/50pcs	36*36*23cm/50pcs

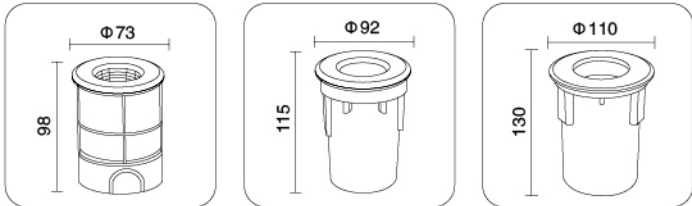


Technical Parameter

Model	73	92	110
Size	Φ73*H98mm	Φ92*H115mm	Φ110*H130mm
Rated Power	3W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ68*H100mm	Φ87*H120mm	Φ105*H140mm
N.W/G.W	0.6kg/0.64kg	0.9kg/0.98kg	1.1kg/1.3kg
Packing Size	42.5*25.5*26cm/30pcs	51.5*21.5*28.5cm/20pcs	58*24*35.5cm/20pcs





(customized choice)



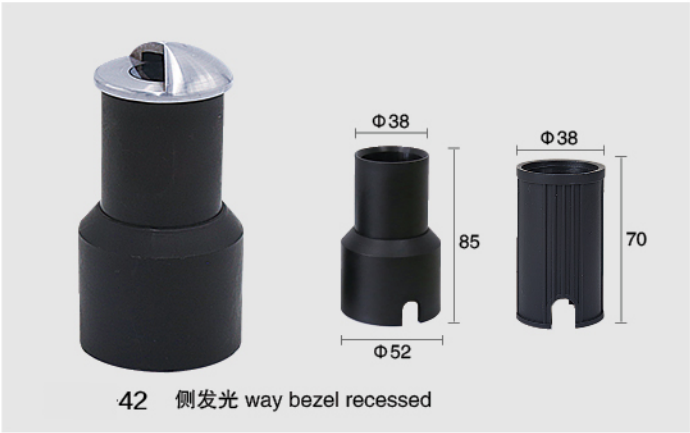

42 侧发光 way bezel recessed

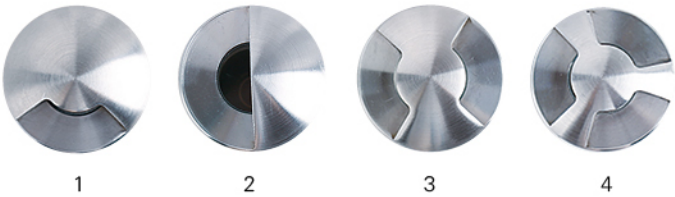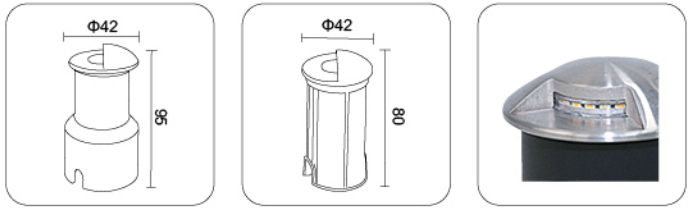


Technical Parameter

Model	42	
Size	Φ42*H95mm	Φ42*H80mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ38*H85mm	Φ40*H75mm
N.W/G.W	0.26kg/0.29kg	
Packing Size	33.5*33.5*21.5cm/50pcs	




52 侧发光 way bezel recessed

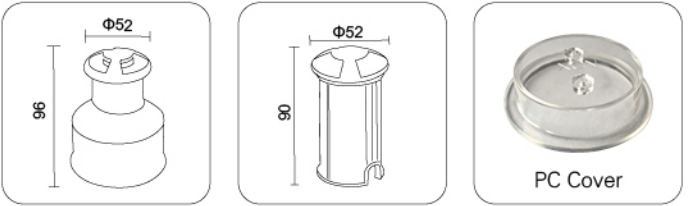

Technical Parameter

Model	52	
Size	Φ52*H96mm	Φ52*H90mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ41*H90mm	Φ48*H85mm
N.W/G.W	0.31kg/0.34kg	
Packing Size	33.5*33.5*21.5cm/50pcs	

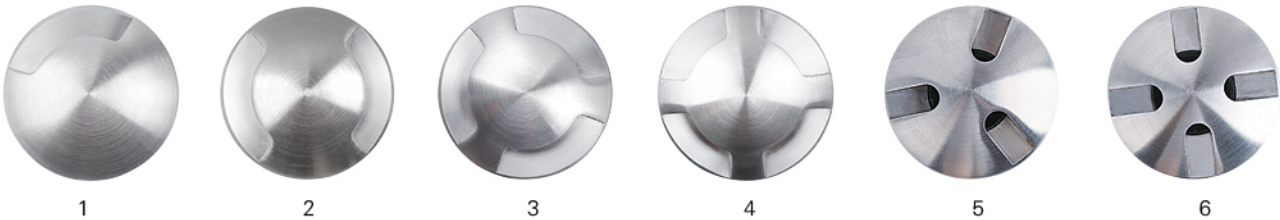




LED Mini Recessed Lights



- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass
or PC cover, ABS box

Technical Parameter


Model	62	
Size	Φ62*H110mm	Φ62*H100mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ53*H100mm	Φ55*H90mm
N.W/G.W	0.38kg/0.41kg	
Packing Size	36*36*23cm/50pcs	

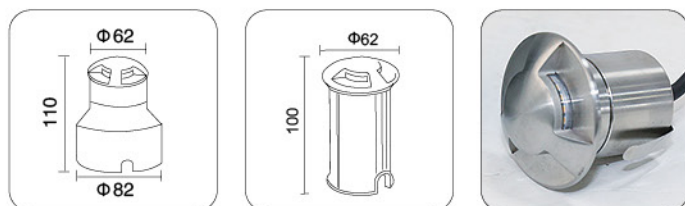

- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass
or PC cover, ABS box



Technical Parameter

Model	73	
Size	Φ73*H115mm	
Rated Power	3W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ68*H100mm	
N.W/G.W	0.68kg/0.73kg	
Packing Size	42.5*25.5*26cm/30pcs	





92 侧发光 way bezel recessed



PC Cover

- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass
or PC cover, ABS box

Technical Parameter

Model	92
Size	Φ92*H125mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ87*H115mm
N.W/G.W	1.07kg/1.12kg
Packing Size	51.5*21.5*28.5cm/20pcs



110
侧发光 way bezel recessed



Technical Parameter

Model	110
Size	Φ110*H150mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ105*H140mm
N.W/G.W	1.66kg/1.7kg
Packing Size	58*24*35.5cm/20pcs



LED Mini Recessed Lights



A55





A20



A35



- ◆ Chip: Cree/Osram/Epistar
- ◆ CCT: 3000K/4000K/6000K
- ◆ Material: Aluminum body+Stainless steel cover+Glass(Clear/Frosted)
- ◆ Input Voltage: DC12V/DC24V

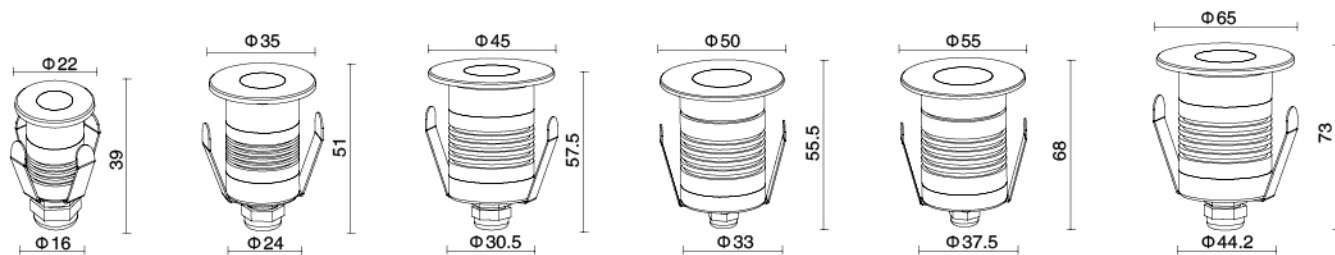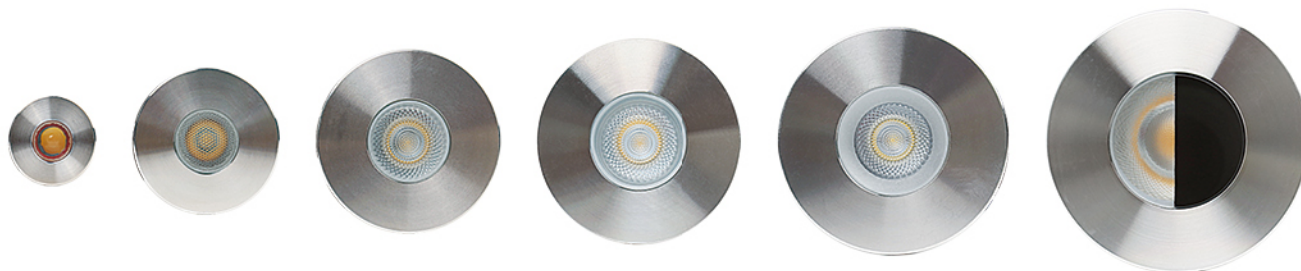

Technical Parameter

Model	Size(mm) with box		RatedPower	Hole Size(mm)	Angle(LENS)
	Φ	H			
A20	22	39	0.7W SMD Epistar	Φ20*H45	120°
A35	35	71	2W LED Osram	Φ32*H75	30°
A45	45	79	3W LED Cree	Φ41*H85	15/30/45/60°
A50	50	76	3W LED Cree	Φ45*H80	15/30/45/60°
A55	55	89	3W LED Cree	Φ48*H95	15/30/45/60°
A65	65	92	5W COB Cree	Φ55*H100	36/50°