





LED Spike Lights



Y40



A1




A2



B1



B2

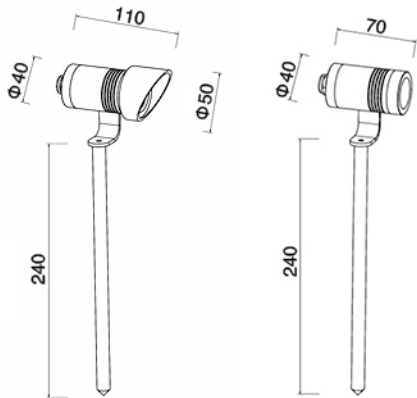

Chip: Cree
CCT: 3000K/4000K/6000K
Material: Aluminum body+Glass(Clear/Frosted)
Input Voltage: DC12V/DC24V



Technical Parameter

Model	Size(mm)			Rated Power	Angle (Lens)
	Φ	L	H		
Y40	50	110	240	5W COB	30°
	40	70	240	5W COB	30°




C901

C601



R60





Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
C901	Φ 90*140*H880	6*2W	CREE	6° /15° /30°
C601	Φ 60*100*H550	3*2W	CREE	6° /15° /30°
R60	Φ 60*100*H170	3*2W	CREE	6° /15° /30°



XGN-R901

R601

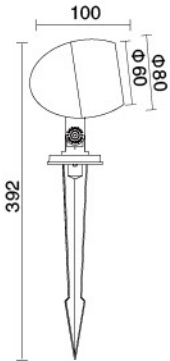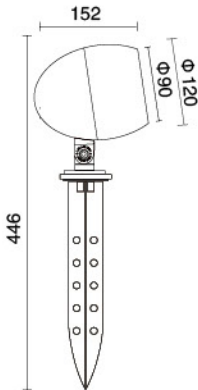

Technical Parameter


Model	Size(mm)	Rated Power	Chip	Angle (Lens)
R901	Φ 90*140*H880	6*2W	CREE	6° /15° /30°
R601	Φ 60*100*H550	3*2W	CREE	6° /15° /30°





LED Spike Lights



2071



2072

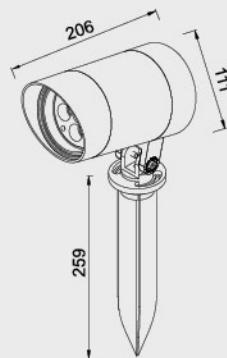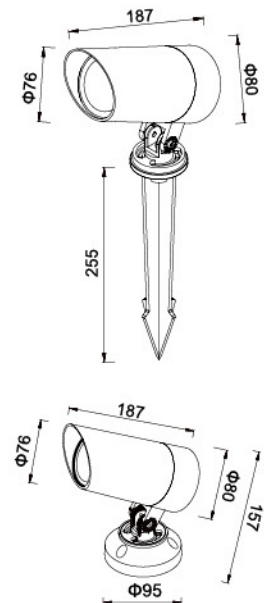

2073

Technical Parameter


Model	Size(mm)	Rated Power	N.W(kg)	Beam Angle	Packing Size
2071	Φ 60*136*H163	5W COB	0.64	24° /38°	42*34*31cm/12pcs
2072	Φ 76*187*H255	10W COB/3*3W	1.12	38° (COB) 6° /15° /30° /45° /60° (LENS)	50*42*39cm/12pcs
2073	Φ 101*206*H259	15W COB/6*3W	2.00	38° (COB) 6° /15° /30° /45° /60° (LENS)	50*42*39cm/6pcs



2207



2208



- ◆ Chip: Osram
- ◆ CCT: 3000K/4000K/6000K/RGBW
- ◆ Material: Aluminum Body+Spike or Base+Tempered Glass(clear or frosted)
- ◆ Input Voltage: 12V/24V/220-240V 50-60Hz

Technical Parameter


Model	Lamp Size(mm)	Power	N.W(kg)	Packing Size	Angle(lens)
2208	D90x118xH160/H344	6W	0.75	42x34x31cm/12pcs	30°
2206	D115x170xH421/H193	12W	1.2	50x42x39cm/12pcs	
2207	D157x221xH460/H	24W	2.1	49.5x48.5x36cm/8pcs	




LED Spike Lights



Y60

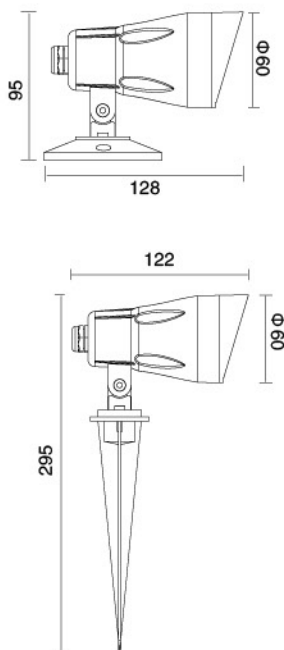

Y85

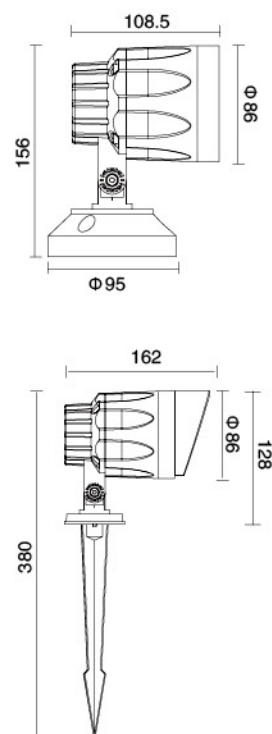



- ◆ Chip: CREE
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V/220V 50-60Hz

Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
Y60	Φ60*122*H295	3W COB/1*3W	CREE	COB 38° 单颗 6° /15° /30°
Y85	Φ86*162*H380	10W COB/3*3W	CREE	COB 38° 单颗 6° /15° /30°





Y140

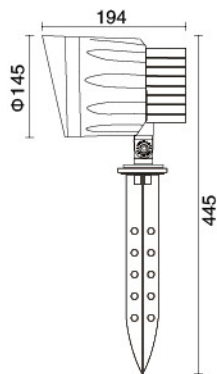

- ◆ Chip: CREE XPE
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Y110

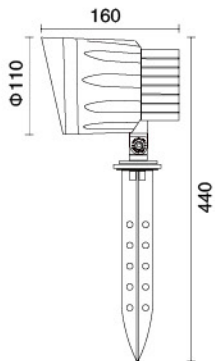

Technical Parameter

Model	Size(mm)	Rated Power	N.W(kg)	N.W(kg)	Packing Size
Y110	φ 110*160*H440	20W COB/6*3W	2	38° (COB) 6° /15° /30° /45° /60° (LED)	50*42*39cm/12pcs
Y140	φ 145*194*H445	30W COB/9*3W	2.85	17° /38° (COB) 6° /15° /30° /45° /60° (LED)	49.5*48.5*36cm/8pcs