






B10




B13



B145




B150



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, PC glass
- ◆ Input Voltage: 12V/24V/110-240V

Technical Parameter

Model	Size(mm)	Rated Power
B10	Φ100*H30	3W
B13	Φ130*H40	3W
B145	Φ145*H50	3W
B150	Φ150*H30	4x1.5W

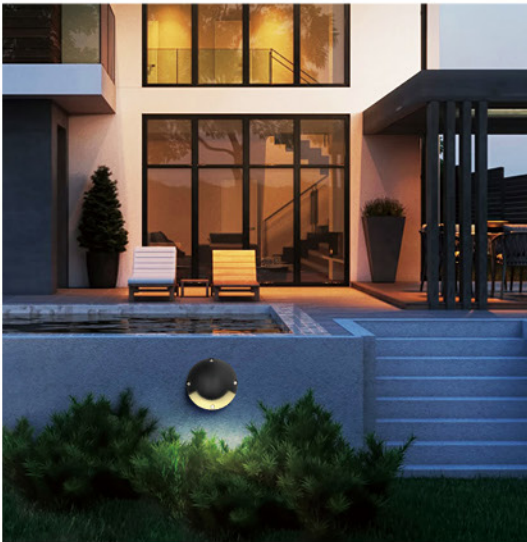





LED Step Lights and Wall Lights




2203




2204



2202



2205




- ◆ Chip: Epistar
- ◆ CCT: 3000K/4000K/6000K
- ◆ Material: : Aluminum Body+ABS Embedded Part+Tempered Glass(clear or frosted)
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz

Technical Parameter


Model	Lamp Size(mm)	Power	Hole Size(mm)	N.W(kg)	Angle
2201	L205x107xH71	10W	L191xW92	0.78	ONE WAY
2203	L106x106xH71	3W	L93xW93	0.4	
2202	L160x65xH77	3W	L147xW53	0.4	
2204	L160x65xH77	2W	L95xW55	0.3	
2205	L109x72xH73	3W	L147xW53	0.4	120°



B1001



B1002



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz

Technical Parameter


Model	Size(mm)	Light Source Power	Total power(W)	N.W(kg)
B1001	Φ 100*150*H126mm	COB 15W*1 side	15W	1.6kg
		6*3W*1 side	18W	1.6kg
B1002	Φ 100*150*H200mm	COB 15W*2 side	30W	2.4kg
		6*3W*2 side	36W	2.4kg




LED Step Lights and Wall Lights



B7201



B7202



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz

Technical Parameter

Model	Size(mm)	Light Source Power	Total power(W)	N.W(kg)
B7201	Φ 72*120*H126mm	COB 10W*1 side	10Wx1	1.0kg
		3*3W*1 side	9Wx1	1.0kg
B7202	Φ 72*120*H200mm	COB 10W*2 side	10Wx2	1.5kg
		3*3W*2 side	9Wx2	1.5kg