

LED 8G STREET LIGHT




25-240W

产品特点 Advantages


- 专利私模，一体化压铸铝外壳.
- 高光效, 130/150/170lm/w3种方案可选.
- 采用专业防眩光透镜: PC透镜角度 60°/90°/120°/T2M/T3M/T4M.
- 0/1-10V调光, 时间控制, 光感应, 物联网控制等功能可选.
- 扁平蜂窝设计, 散热性好.
- 水平定位仪便于安装.
- 安装轴角度可安装调节90/180°.
- 防护等级达到IP66.
- 可更换42/50/60mm安装头.
- Patent private mould, integrated die-casting AL.
- High efficiency, 130lm/w, 150lm/w, 170lm/w available.
- Professional glare-free lens, 60°/90°/120°/T2M/T3M/T4M.
- 0-10V dimming/time control/Light sensor/IOT control available.
- Flat honeycomb design, good heat dissipation.
- Gradienter design: easy for horizontal installation.
- Angle of mounting shaft can be installed and adjusted 90/180°.
- IP 66.
- 42/50/60mm hole size is available.

产品尺寸 Dimension

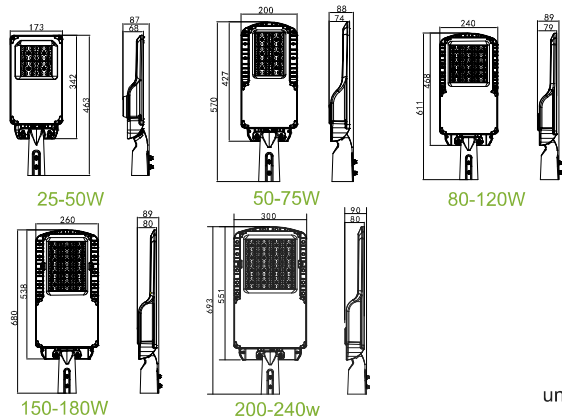

unit: mm

配光曲线/Distribution curve

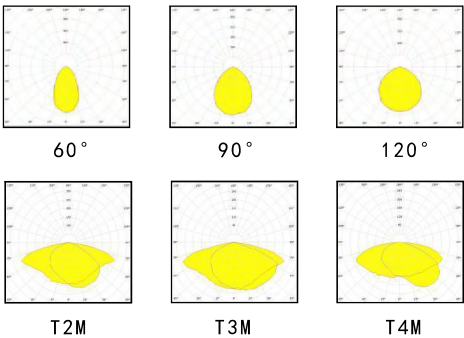

规格参数 Specification

产品型号 Model	功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle
S8-25W	25W	AC100V-240V	130-170lm/w	3030/5050	64/96/32pcs	463*173*87mm	60°/90°/120°/T2M/T3M/T4M
S8-40W	40W	AC100V-240V	130-170lm/w	3030	96pcs	463*173*87mm	60°/90°/120°/T2M/T3M/T4M
S8-50W	50W	AC100V-240V	130-170lm/w	3030/5050	64/96/24/32pcs	463*173*87mm	60°/90°/120°/T2M/T3M/T4M
S8-60W	60W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	570*200*88mm	60°/90°/120°/T2M/T3M/T4M
S8-75W	75W	AC100V-240V	130-170lm/w	3030/5050	96/144/36/48pcs	570*200*88mm	60°/90°/120°/T2M/T3M/T4M
S8-80W	80W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	611*240*89mm	60°/90°/120°/T2M/T3M/T4M
S8-100W	100W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	611*240*89mm	60°/90°/120°/T2M/T3M/T4M
S8-120W	120W	AC100V-240V	130-170lm/w	3030/5050	144/216/54/72pcs	611*240*89mm	60°/90°/120°/T2M/T3M/T4M
S8-150W	150W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	680*260*89mm	60°/90°/120°/T2M/T3M/T4M
S8-180W	180W	AC100V-240V	130-170lm/w	3030/5050	192/288/72/96pcs	680*260*89mm	60°/90°/120°/T2M/T3M/T4M
S8-200W	200W	AC100V-240V	130-170lm/w	3030/5050	256/384/96/128pcs	680*260*90mm	60°/90°/120°/T2M/T3M/T4M
S8-240W	240W	AC100V-240V	130-170lm/w	3030/5050	256/384/96/128pcs	680*260*90mm	60°/90°/120°/T2M/T3M/T4M
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty	
IP 66	3000-6000k	Ra > 70	压铸铝/ADC12	-40 ~ 50℃	> 50000h	5 Years	

LED 7G STREET LIGHT (pressure ring type)




25-320w

产品特点 Advantages


- 专利私模，一体化铝合金压铸。
- 高光效，130lm/w, 150lm/w, 170lm/w三种方案可选。
- 采用专业防眩光透镜:PC透镜角度60°/90°/120°/T2M/T3M/T4M。
- 0/1-10V调光，时间控制，光感应，物联网控制等功能可选。
- 扁平蜂窝设计，散热性好。
- 水平定位仪便于安装。
- 钢化玻璃面板，免胶水固定。
- 卡扣式安装，免工具拆卸。
- 防护等级达到IP66。
- 可更换42/50/60mm安装头。
- Patent private mould, integrated die-casting AL.
- High efficiency, 130lm/w, 150lm/w, 170lm/w available.
- Professional glare-free lens, 60°/90°/120°/T2M/T3M/T4M.
- 0-10V dimming/time control/Light sensor/IOT control available.
- Flat honeycomb design, good heat dissipation.
- Gradienter design: easy for horizontal installation.
- Tempered glass panel, no glue fixed.
- Snap-on type installation, tool-free disassembly.
- IP 66.
- 42/50/60mm hole size is available.

产品尺寸 Dimension

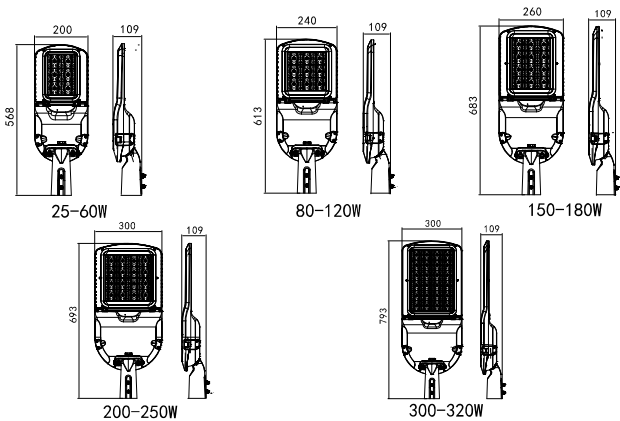

unit: mm

配光曲线/Disrtibution curve

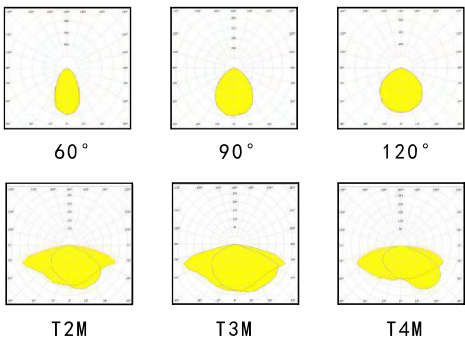

规格参数 Specification

产品型号 Model	功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle
	25W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	50W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	60W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	80W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	100W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	120W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	150W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	683*260*109mm	60°/90°/120°/T2M/T3M/T4M
	180W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	683*260*109mm	60°/90°/120°/T2M/T3M/T4M
	200W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	693*300*109mm	60°/90°/120°/T2M/T3M/T4M
	250W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	693*300*109mm	60°/90°/120°/T2M/T3M/T4M
	300W	AC100V-240V	130-170lm/w	3030/5050	384/576/192pcs	793*300*109mm	60°/90°/120°/T2M/T3M/T4M
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty	
IP 66	3000-6000k	Ra > 70	压铸铝/ADC12	-40 ~ 50°C	> 50000h	5 Yeas	



产品特点	Advantages
● 专利私模，一体化铝合金压铸。 ● 高光效，130lm/w, 150lm/w, 170lm/w三种方案可选。 ● 采用专业防眩光透镜:PC透镜角度60°/90°/120°/T2M/T3M/T4M。 ● 0/1-10V调光，时间控制，光感应，物联网控制等功能可选。 ● 扁平蜂窝设计，散热性好。 ● 水平定位仪便于安装。 ● 钢化玻璃面板，免胶水固定。 ● 卡扣式安装，免工具拆卸。 ● 防护等级达到IP66。 ● 可更换42/50/60mm安装头。	● Patent private mould, integrated die-casting AL. ● High efficiency, 130lm/w, 150lm/w, 170lm/w available. ● Professional glare-free lens, 60°/90°/120°/T2M/T3M/T4M. ● 0-10V dimming/time control/Light sensor/IOT control available. ● Flat honeycomb design, good heat dissipation. ● Gradienter design: easy for horizontal installation. ● Tempered glass panel, no glue fixed. ● Snap-on type installation, tool-free disassembly. ● IP 66. ● 42/50/60mm hole size is available.

产品尺寸	Dimension
	配光曲线/Disrtibution curve 60° 90° 120° T2M T3M T4M unit: mm

规格参数		Specification					
	功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle
	25W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	50W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	60W	AC100V-240V	130-170lm/w	3030/5050	96/144/48pcs	568*200*109mm	60°/90°/120°/T2M/T3M/T4M
	80W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	100W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	120W	AC100V-240V	130-170lm/w	3030/5050	144/216/72pcs	613*240*109mm	60°/90°/120°/T2M/T3M/T4M
	150W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	683*260*109mm	60°/90°/120°/T2M/T3M/T4M
	180W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	683*260*109mm	60°/90°/120°/T2M/T3M/T4M
	200W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	693*300*109mm	60°/90°/120°/T2M/T3M/T4M
	250W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	693*300*109mm	60°/90°/120°/T2M/T3M/T4M
	300W	AC100V-240V	130-170lm/w	3030/5050	384/576/192pcs	793*300*109mm	60°/90°/120°/T2M/T3M/T4M
	防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty
IP 66	3000-6000k	Ra > 70	压铸铝/ADC12	-40 ~ 50℃	> 50000h	5 Yeas	



产品特点	Advantages
● 专利私模，一体化铝合金压铸； ● 高光效，130lm/w, 150lm/w, 170lm/w 三种方案可选； ● 采用专业防眩光透镜：PC透镜角度T2M、T3M、T4M、60°、90°； ● 0/1-10V调光，时间控制，光感应，物联网控制等功能可选； ● 蝙蝠翼光型； ● 水平定位便于安装； ● 防护等级达到IP66； ● 压片式安装； ● 卡扣式安装，免工具拆卸； ● 多种使用场所：路灯，鞋盒灯，投光灯等；	● Patent private mould, integrated die-casting AL ● High efficiency, 130lm/w, 150lm/w, 170lm/w available ● Professional glare-free lens, TYPE2/TYPE3/TYPE4/60°/90° available ● 0-10V dimming/time control/light sensor/IOT control available ● Bat wing light shape ● Gradienter design: easy for horizontal installation ● IP66 ● Specilized aluminum sheet design, glue-free for glass fixation ● Snap-on type driver housing, tool-free disassembly ● Various applications: street light, shoe box light, projector, etc.

产品尺寸	Dimension
25-80w 90-150w 150-200w 200-300w 300-400w	配光曲线/Disrtibution curve T2M配光曲线 T3M配光曲线 T4M配光曲线 T2M配光曲线 T3M配光曲线 T4M配光曲线

规格参数		Specification				
功率 Power	电压 voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED QTY	产品尺寸 Dimension	发光角度 Beam Angle
25W	AC100V-240V	130-170lm/w	3030/5050	64/96/32pcs	522*205*90mm	T2M/T3M/T4M/60°/90°
30W	AC100V-240V	130-170lm/w	3030/5050	64/96/32pcs	522*205*90mm	T2M/T3M/T4M/60°/90°
50W	AC100V-240V	130-170lm/w	3030/5050	64/96/32pcs	522*205*90mm	T2M/T3M/T4M/60°/90°
60W	AC100V-240V	130-170lm/w	3030/5050	64/96/32pcs	522*205*90mm	T2M/T3M/T4M/60°/90°
80W	AC100V-240V	130-170lm/w	3030/5050	96/32pcs	522*205*90mm	T2M/T3M/T4M/60°/90°
80W	AC100V-240V	130-170lm/w	3030/5050	128/192/64pcs	508*291*94mm	T2M/T3M/T4M/60°/90°
100W	AC100V-240V	130-170lm/w	3030/5050	128/192/64pcs	508*291*94mm	T2M/T3M/T4M/60°/90°
120W	AC100V-240V	130-170lm/w	3030/5050	128/192/64pcs	508*291*94mm	T2M/T3M/T4M/60°/90°
150W	AC100V-240V	130-170lm/w	3030/5050	192/64pcs	508*291*94mm	T2M/T3M/T4M/60°/90°
150W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	569*291*94mm	T2M/T3M/T4M/60°/90°
180W	AC100V-240V	130-170lm/w	3030/5050	192/288/96pcs	569*291*94mm	T2M/T3M/T4M/60°/90°
200W	AC100V-240V	130-170lm/w	3030/5050	288/96pcs	569*291*94mm	T2M/T3M/T4M/60°/90°
200W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	680*307*94mm	T2M/T3M/T4M/60°/90°
250W	AC100V-240V	130-170lm/w	3030/5050	256/384/128pcs	680*307*94mm	T2M/T3M/T4M/60°/90°
300W	AC100V-240V	130-170lm/w	3030/5050	384/128pcs	680*307*94mm	T2M/T3M/T4M/60°/90°
300W	AC100V-240V	130-170lm/w	3030/5050	384/576/192pcs	842*307*94mm	T2M/T3M/T4M/60°/90°
360W	AC100V-240V	130-170lm/w	3030/5050	384/576/192pcs	842*307*94mm	T2M/T3M/T4M/60°/90°
400W	AC100V-240V	130-170lm/w	3030/5050	576/192pcs	842*307*94mm	T2M/T3M/T4M/60°/90°
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty
IP 66	2800-6000K	Ra>70	压铸铝/ADC12	-40~50℃	>50000h	5 Years

LED 5G STREET LIGHT



25-180w



25-180w

产品特点	Advantages
• 专利私模，一体化铝合金压铸； • 高光效，130lm/w-150lm/w 两种方案可选； • 采用专业防眩光透镜:PC透镜角度T2M和T3M； • 0/1-10V 调光，时间控制，光感应, 互联网控制等功能可选； • 蝙蝠翼光型； • 水平定位仪便于安装； • 压片式安装，免胶水固定； • 防护等级达到IP66；	• Patent private mould, integrated die-casting AL. • High efficiency, 130lm/w-150lm/w available. • Professional glare-free lens, TYPE2/TYPE3 available. • 0-10V dimming/time control/light sensor/IOT control available. • Bat wing light shape. • Gradienter design: easy for horizontal installation. • Specilized aluminum sheet design, glue-free for glass fixation. • IP66

产品尺寸	Dimension	配光曲线/Disrtibution curve			
25W-60W	80-120W	150-180W	T2M配光曲线 Distribution Curve of Meridian T3M配光曲线 Distribution Curve of Meridian T4M配光曲线 Distribution Curve of Meridian Control Intensity Distribution Curve of Max Intensity Control Intensity Distribution Curve of Min Intensity 平均照度曲线 (照度≥133lx/m²) 规格参数		
规格参数	Specification	unit:mm			

规格参数		Specification					Unit:mm
功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle	
25W	AC 100-240V	130lm/w-150lm/w	3030	64pcs	491*190*82mm	T2M/T3M	
30W	AC 100-240V	130lm/w-150lm/w	3030	64pcs	491*190*82mm	T2M/T3M	
40W	AC 100-240V	130lm/w-150lm/w	3030	64pcs	491*190*82mm	T2M/T3M	
50W	AC 100-240V	130lm/w-150lm/w	3030	96pcs	491*190*82mm	T2M/T3M	
60W	AC 100-240V	130lm/w-150lm/w	3030	96pcs	491*190*82mm	T2M/T3M	
80W	AC 100-240V	130lm/w-150lm/w	3030	144pcs	547*240*82mm	T2M/T3M	
90W	AC 100-240V	130lm/w-150lm/w	3030	144pcs	547*240*82mm	T2M/T3M	
100W	AC 100-240V	130lm/w-150lm/w	3030	216pcs	547*240*82mm	T2M/T3M	
120W	AC 100-240V	130lm/w-150lm/w	3030	216pcs	547*240*82mm	T2M/T3M	
150W	AC 100-240V	130lm/w-150lm/w	3030	288pcs	550*280*89mm	T2M/T3M	
180W	AC 100-240V	130lm/w-150lm/w	3030	288pcs	550*280*89mm	T2M/T3M	
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature		工作寿命 Lifetime	质保 Warranty
IP 66	2800-5500K	>70	压铸铝/ADC12	-20~50℃		>50000h	5 Years


LED 2G STREET LIGHT



产品特点 Advantages

- 专利私模，一体化铝合金压铸成型
- 采用专业防眩光透镜
48头透镜角度80°140°偏光30°
22头透镜角度80°150°偏光60°
- 0/1-10V调光，时间控制，光感应等功能可供选
- 安装方式：转头，直头可供选
- 颜色：亚黑色、银灰色，其他颜色可以定制
- 背面防漏光
- 水平仪定位
- 防水等级IP66
- Patent private mould, integrated die-casting AL.
- Professional glare-free lens,asymmetrical angles available:
Lens fitting 48pcs led: 80 * 140°partial 30°.
Lens fitting 22*4pcs led: 80 * 150° partial 60°.
- 0/1-10V dimming,time control, daylight sensor available.
- Installation: rotating joint / non-rotating joint available.
- Color: matte black, silver grey, other colors customizable.
- Light leakage free from the rear part.
- Gradienter helps to adjust the position.
- IP66.

产品尺寸 Dimension

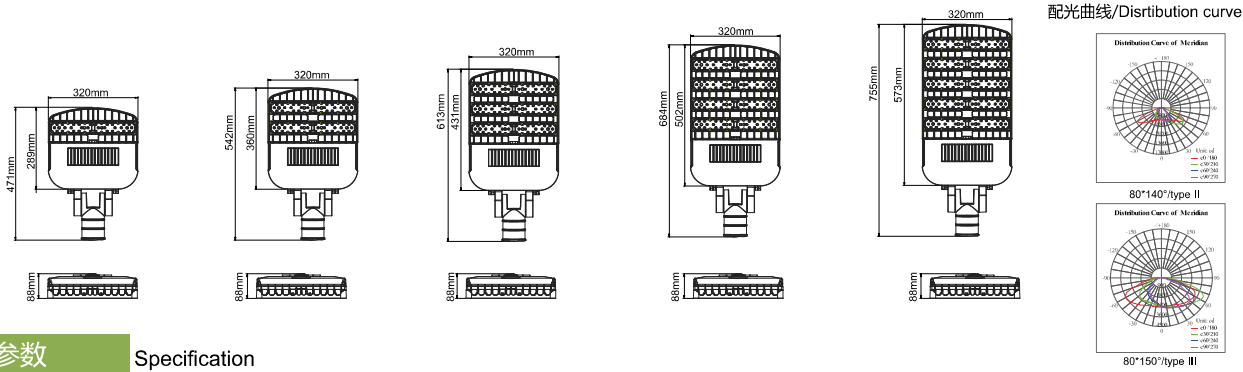

规格参数 Specification

功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle
50W	AC 100-240V	120lm/w-150lm/w	3030 5050	48/66/88pcs 22/48pcs	471*320*88mm	80°140° /80°150°
100W	AC 100-240V	120lm/w-150lm/w	3030 5050	96/132/176pcs 44/96pcs	542*320*88mm	80°140° /80°150°
150W	AC 100-240V	120lm/w-150lm/w	3030 5050	144/198/264pcs 66/144pcs	613*320*88mm	80°140° /80°150°
200W	AC 100-240V	120lm/w-150lm/w	3030 5050	192/264/352pcs 88/192pcs	684*320*88mm	80°140° /80°150°
240W	AC 100-240V	120lm/w-150lm/w	3030 5050	240/330/440pcs 110/240pcs	755*320*88mm	80°140° /80°150°
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty
IP 67	2700-6500K	>80	压铸铝/ADC12	-20~50℃	>50000h	5 Years


LED 2G STREET LIGHT



产品特点 Advantages

- 专利私模，一体化铝合金压铸成型
- 采用专业防眩光透镜
48头透镜角度80°140°偏光30°
22头透镜角度80°150°偏光60°
- 0/1-10V调光，时间控制，光感应等功能可供选
- 安装方式：转头，直头可供选
- 颜色：亚黑色、银灰色，其他颜色可以定制
- 背面防漏光
- 水平仪定位
- 防水等级IP66
- Patent private mould, integrated die-casting AL.
- Professional glare-free lens, asymmetrical angles available:
Lens fitting 48pcs led: 80° * 140° partial 30°.
Lens fitting 22*4pcs led: 80° * 150° partial 60°.
- 0/1-10V dimming, time control, daylight sensor available.
- Installation: rotating joint / non-rotating joint available.
- Color: matte black, silver grey, other colors customizable.
- Light leakage free from the rear part.
- Gradienter helps to adjust the position.
- IP66.

产品尺寸 Dimension

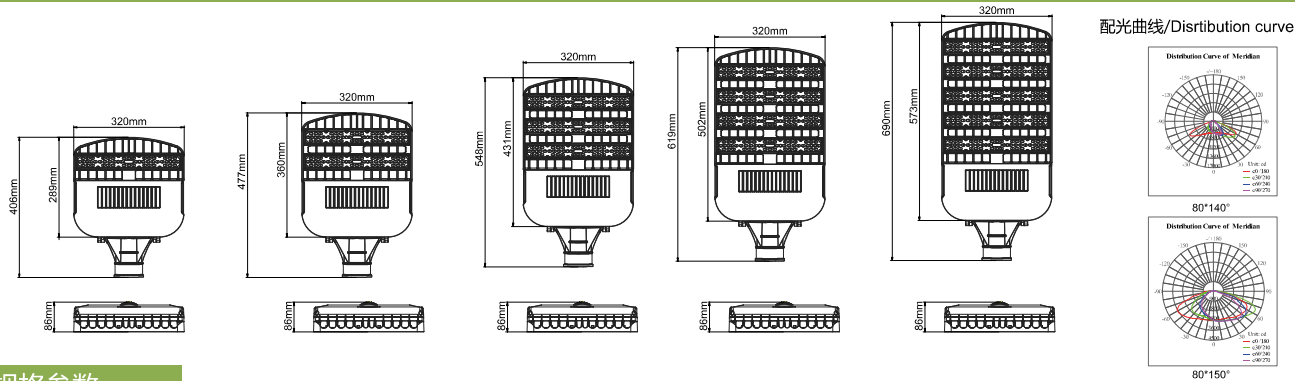

规格参数 Specification

功率 Power	电压 Voltage	光效 Efficiency	灯珠型号 Chip	灯珠数量 LED Qty	产品尺寸 Dimension	发光角度 Beam Angle
50W	AC 100-240V	120lm/w-150lm/w	3030 5050	48/66/88pcs 22/48pcs	406*320*86mm	80°140° / 80°150°
100W	AC 100-240V	120lm/w-150lm/w	3030 5050	96/132/176pcs 44/96pcs	477*320*86mm	80°140° / 80°150°
150W	AC 100-240V	120lm/w-150lm/w	3030 5050	144/198/264pcs 66/144pcs	548*320*86mm	80°140° / 80°150°
200W	AC 100-240V	120lm/w-150lm/w	3030 5050	192/264/352pcs 88/192pcs	619*320*86mm	80°140° / 80°150°
240W	AC 100-240V	120lm/w-150lm/w	3030 5050	240/330/440pcs 110/240pcs	690*320*86mm	80°140° / 80°150°
防护等级 IP Rank	色温 CCT	显指 CRI(Ra)	外壳材质 Material	工作温度 Operating Temperature	工作寿命 Lifetime	质保 Warranty
IP 66	2700-6500K	>80	压铸铝/ADC12	-20~50℃	>50000h	5 Years