



Huzhou Charming Lighting Co., Ltd.
Tel: (86) 18006626989 Email: feng@charming-tech.cn

UCS512 DMX LED Strip

- 1. Brand UCS512 IC with stable quality
- 2. DMX512 signal, more vivid and efficient in color transformation
- 3. More stable performance in harsh environments
- 4. White/Dual White/RGB/RGBW/RGB CCT available



*Please contact our sales for the latest details and certificates



UCS512 DMX Version

	LED Type	LED QTY	Power	Brightness	Increment	Voltage	IC Type	Colors	IP Rating	Dimension @IP20
	3527	120LED/M	19.2W/M	1728lm/M	100mm	DC24V	10PCS UCS512H4L	Dual White	IP20/64/66/68	L5000*W10mm
		37LED/ft.	5.85W/ft.	527lm/ft.	3.94in					L197*W0.4in
	3527	120LED/M	19.2W/M	1728lm/M	50mm	DC24V	20PCS UCS512H4L	Dual White	IP20/64/66/68	L5000*W10mm
		37LED/ft.	5.85W/ft.	527lm/ft.	1.97in					L197*W0.4in
	5050 5in1	60LED/M	23W/M	1265lm/M	100mm	DC24V	10PCS UCS512G6	RGB CCT	IP20/64/66/68	L5000*W12mm
		18LED/ft.	7.01W/ft.	386lm/ft.	3.94in					L197*W0.47in
	5050 RGB	48LED/M	11.52W/M	403lm/M	125mm	DC24V	8PCS UCS512C4	RGB	IP20/64/66/68	L5000*W12mm
		15LED/ft.	3.51W/ft.	123lm/ft.	4.92in					L197*W0.47in
	5050 RGB	60LED/M	14.4W/M	504lm/M	100mm	DC24V	10PCS UCS512C4	RGB	IP20/64/66/68	L5000*W12mm
		18LED/ft.	4.39W/ft.	154lm/ft.	3.94in					L197*W0.47in
	5050 4in1	48LED/M	12.8W/M	576lm/M	125mm	DC24V	8PCS UCS512C4	RGBW	IP20/64/66/68	L5000*W12mm
		15LED/ft.	3.9W/ft.	175lm/ft.	4.92in					L197*W0.47in
	5050 4in1	60LED/M	16W/M	720lm/M	100mm	DC24V	10PCS UCS512C4	RGBW	IP20/64/66/68	L5000*W12mm
		18LED/ft.	4.88W/ft.	219lm/ft.	3.94in					L197*W0.47in
	2835	120LED/M	11.52W/M	1037lm/M	125mm	DC24V	8PCS UCS512B3	Chasing White	IP20/64/66/68	L5000*W10mm
		37LED/ft.	3.51W/ft.	316lm/ft.	4.92in					L197*W0.4in
	2835	240LED/M	19.2W/M	1920lm/M	50mm	DC24V	20PCS UCS512B3	Dual White	IP20/64/66/68	L5000*W12mm
		73LED/ft.	5.85W/ft.	585lm/ft.	1.97in					L197*W0.47in
	5050 RGB	84LED/M	17.28W/M	605lm/M	83.3mm	DC24V	12PCS UCS512B3	RGB	IP20/64/66/68	L5000*W12mm
		26LED/ft.	5.27W/ft.	184lm/ft.	3.28in					L197*W0.47in

UCS512H4LB CCT 120LEDs/M

- 1. Brand UCS512H4LB IC, chasing dual white, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments


2200K 2400K 2700K 3000K 4000K 5000K 6000K



*Please contact our sales for the latest details and certificates




Dimension (mm)

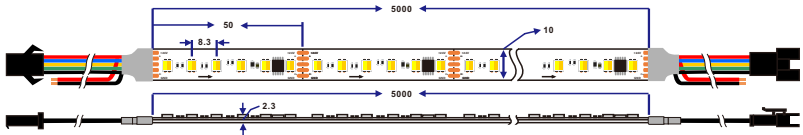


Technical Detail

LED Type	SMD3527 120LED/M
Color	Digital CCT
IC Type	UCS512H4LB
Pixel per meter	20pixel
Voltage Input	DC24V
Power	19.2W/M 5.85W/ft
Luminous Flux	1728lm/M 527lm/ft @4000K
PCB Width	10mm
Beam angle	120°
Cutting Unit	50mm

* PCB width, power and lumen can be customized as per your specified demands.

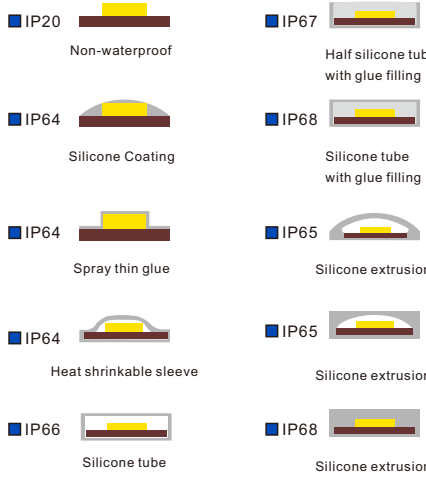


Accessories

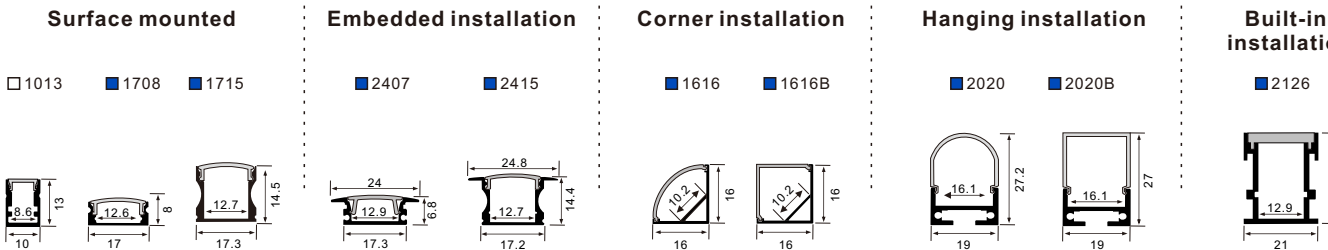

UCS512G6 RGBTW 5in1 60LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments

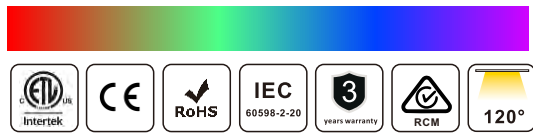

*Please contact our sales for the latest details and certificates



Dimension (mm)

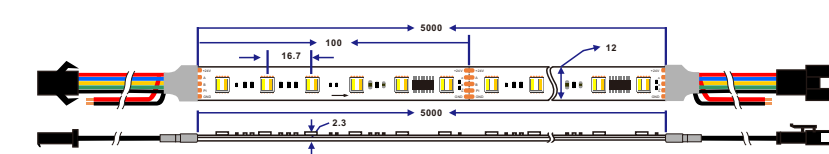

DC24V

Pixel RGBTW

DMX
Programmable

Technical Detail

LED Type	SMD5050 RGBTW 5in1 60LED/M
Color	Digital RGBTW
IC Type	UCS512G6
Pixel per meter	10pixel
Voltage Input	DC24V
Power	23W/M 7.01W/ft
Luminous Flux	1265lm/M 386lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

□ 1013 ■ 1708 ■ 1715

Embedded installation

■ 2407 ■ 2415

Corner installation

■ 3030 ■ 3030B

Hanging installation

■ 2020 ■ 2020B

Built-in installation

■ 2126

UCS512C4 RGBW 48 LEDS/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

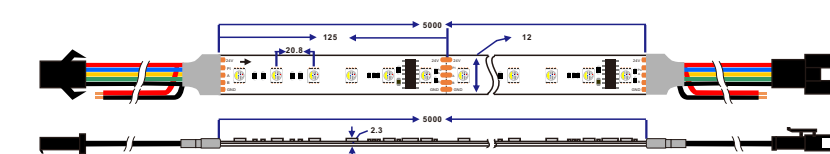

DC24V

Pixel RGBW

DMX
Programmable

Technical Detail

LED Type	SMD5050 RGBW 48LED/M
Color	Digital RGBW
IC Type	UCS512C4
Pixel per meter	8pixel
Voltage Input	DC24V
Power	11.52W/M 3.51W/ft
Luminous Flux	518lm/M 158lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	125mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

□ 1013 ■ 1708 ■ 1715

Embedded installation

■ 2407 ■ 2415

Corner installation

■ 3030 ■ 3030B

Hanging installation

■ 2020 ■ 2020B

Built-in installation

■ 2126

UCS512C4 RGBW 60 LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

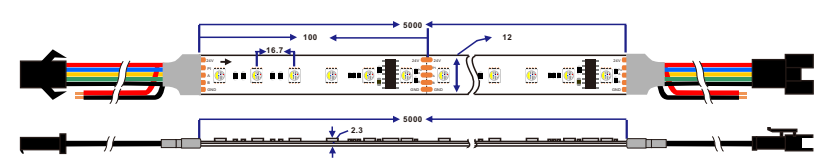


Technical Detail

LED Type	SMD5050 RGBW 4in1 60LED/M
Color	Digital RGBW
IC Type	UCS512C4
Pixel per meter	10pixel
Voltage Input	DC24V
Power	16W/M 4.88W/ft
Luminous Flux	720lm/M 219W/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

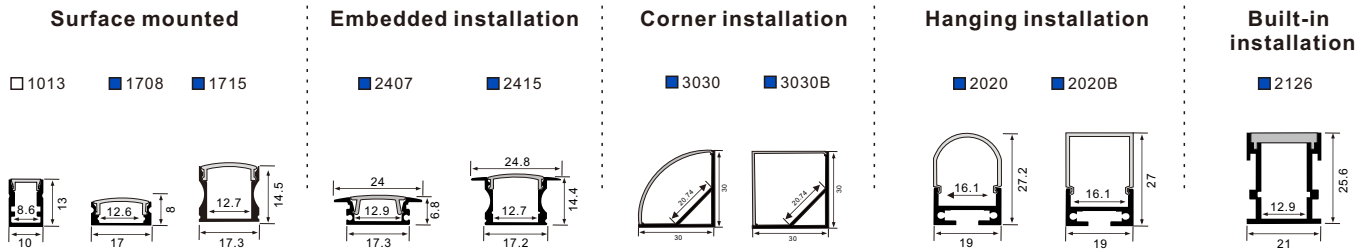

UCS512C4 RGB 60 LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

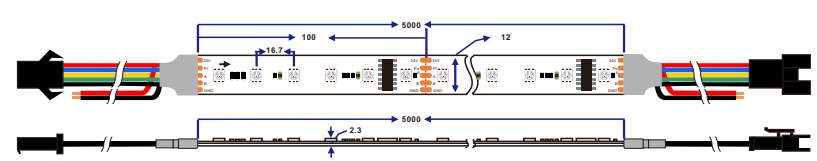


Technical Detail

LED Type	SMD5050 RGB 60LED/M
Color	Digital RGB
IC Type	UCS512C4
Pixel per meter	10pixel
Voltage Input	DC24V
Power	14.4W/M 4.39W/ft
Luminous Flux	504lm/M 153lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

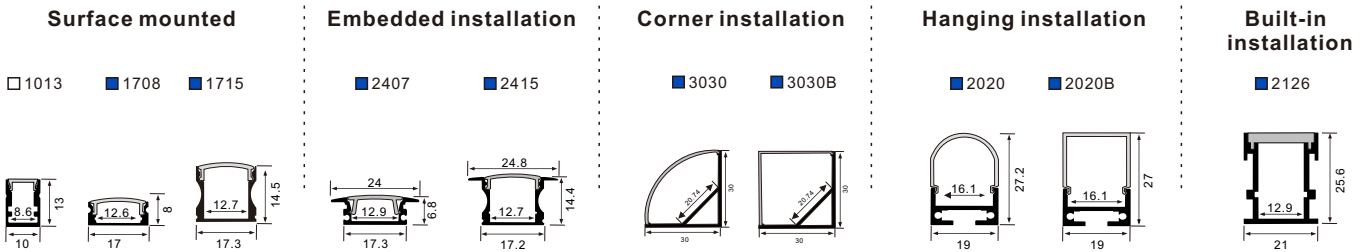

UCS512B3 White 120LEDs/M

- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments


2200K 2400K 2700K 3000K 4000K 5000K 6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

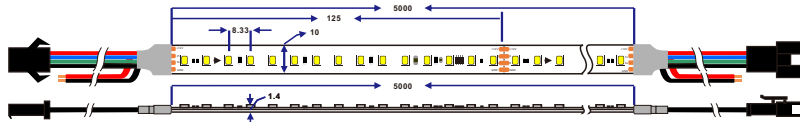


Technical Detail

LED Type	SMD2835 120LED/M
Color	Digital White
IC Type	UCS512B3
Pixel per meter	8pixel
Voltage Input	DC24V
Power	11W/M 3.35W/ft
Luminous Flux	1100lm/M 335lm/ft @4000K Ra90
PCB Width	10mm
Beam angle	120°
Cutting Unit	125mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

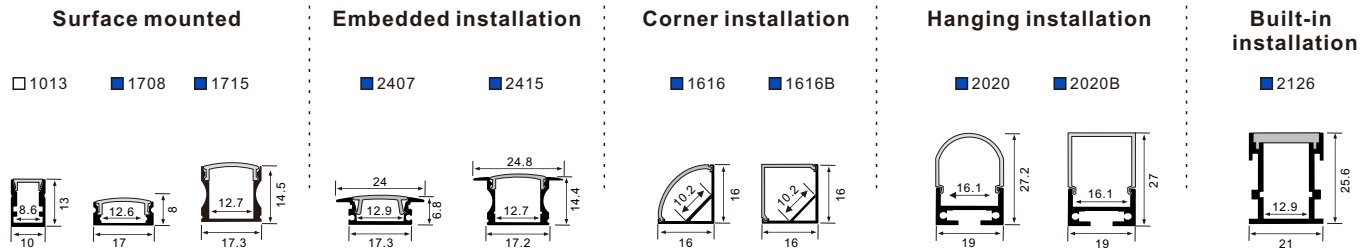

UCS512B3 CCT 240LEDs/M

- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments


2200K 2400K 2700K 3000K 4000K 5000K 6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

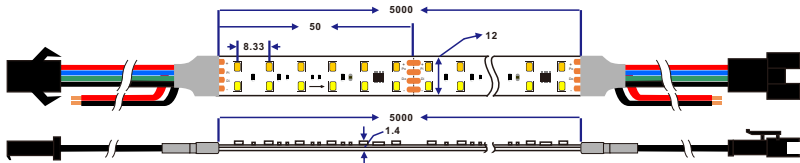


Technical Detail

LED Type	SMD2835 240LED/M
Color	Digital CCT
IC Type	UCS512B3
Pixel per meter	20pixel
Voltage Input	DC24V
Power	19.2W/M 5.85W/ft
Luminous Flux	1920lm/M 585lm/ft @4000K Ra90
PCB Width	12mm
Beam angle	120°
Cutting Unit	50mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

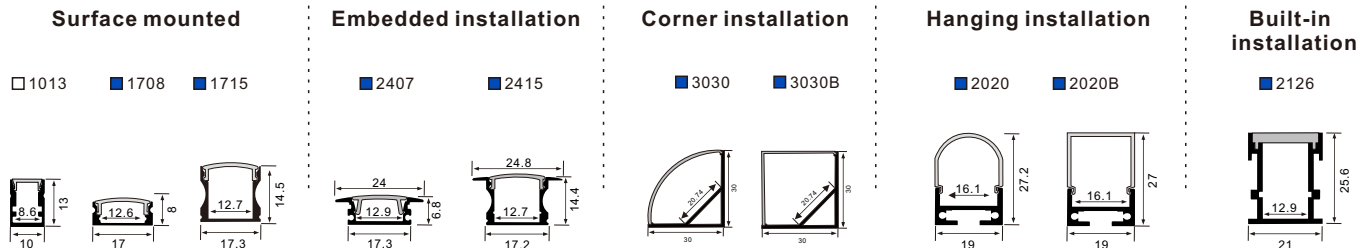

UCS512B3 RGB 84 LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

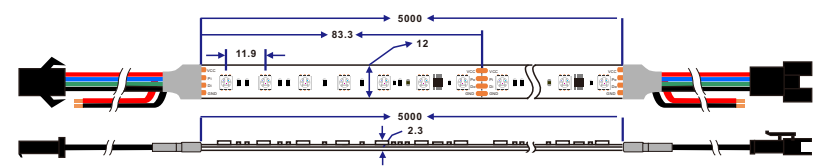

DC24V

Pixel RGB

DMX
Programmable

IP20

Non-waterproof

IP67

Half silicone tube with glue filling

IP64

Silicone Coating

IP68

Silicone tube with glue filling

IP64

Spray thin glue

IP65

Silicone extrusion

IP64

Heat shrinkable sleeve

IP65

Silicone extrusion

IP66

Silicone tube

IP68

Silicone extrusion

Technical Detail	
LED Type	SMD5050 RGB 84LED/M
Color	Digital RGB
IC Type	UCS512B3
Pixel per meter	12pixel
Voltage Input	DC24V
Power	17.28W/M 5.27W/ft
Luminous Flux	605lm/M 184lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	83.3mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

1013

1708

1715

Embedded installation

2407

2415

Corner installation

3030

3030B

Hanging installation

2020

2020B

Built-in installation

2126

Other DMX LED Strip



- 1. Brand Tm512 & Sm18512 IC with stable quality
- 2. DMX512 signal, more vivid and efficient in color transformation
- 3. More stable performance in harsh environments
- 4. Dual White/RGB/RGBW available



*Please contact our sales for the latest details and certificates



Other DMX Version


	LED Type	LED QTY	Power	Brightness	Increment	Voltage	IC Type	Colors	IP Rating	Dimension @IP20
	3014 side view	120LED/M	11.52W/M	1094lm/M	125mm	DC24V	8PCS SM18512	Dual White	IP20/64/66/68	L5000*W12mm
		37LED/ft.	3.51W/ft.	333lm/ft.	4.92in					L197*W0.47in
	2835 RGB	96LED/M	23W/M	805lm/M	62.5mm	DC24V	16PCS SM18512	RGB	IP20/64/66/68	L5000*W12mm
		29LED/ft.	7.01W/ft.	245lm/ft.	2.46in					L197*W0.47in
	5050 4in1	60LED/M	19.2W/M	864lm/M	100mm	DC24V	10PCS TM512AC	RGBW	IP20/64/66/68	L5000*W10mm
		18LED/ft.	5.85W/ft.	263lm/ft.	3.94in					L197*W0.4in
	5050 RGB	60LED/M	14.4W/M	504lm/M	100mm	DC24V	10PCS TM512AC4	RGB	IP20/64/66/68	L5000*W12mm
		18LED/ft.	4.39W/ft.	154lm/ft.	3.94in					L197*W0.47in
	5050 4in1	60LED/M	19.2W/M	864lm/M	100mm	DC24V	10PCS TM512AC4	RGBW	IP20/64/66/68	L5000*W12mm
		18LED/ft.	5.85W/ft.	263lm/ft.	3.94in					L197*W0.47in

TM512AC4 RGB 60LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates

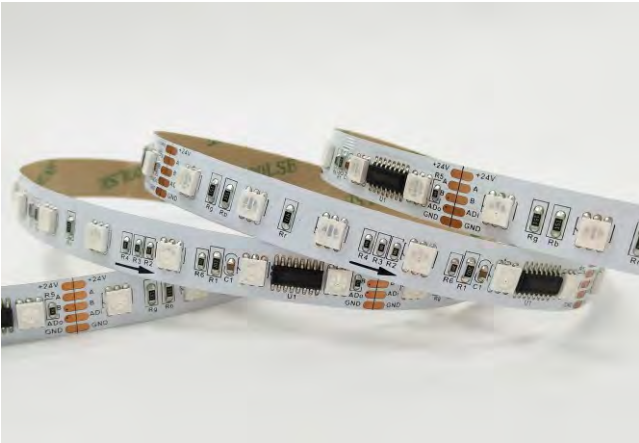

Dimension (mm)

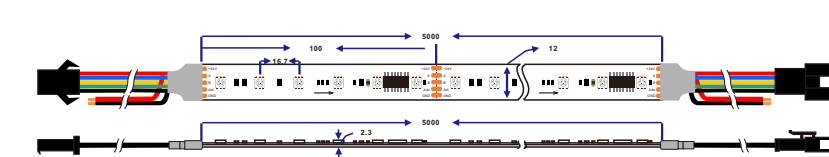


Technical Detail

LED Type	SMD5050 60LED/M
Color	Digital RGB
IC Type	TM512AC4
Pixel per meter	10pixel
Voltage Input	DC24V
Power	14.4W/M 4.39W/ft
Luminous Flux	504lm/M 154lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

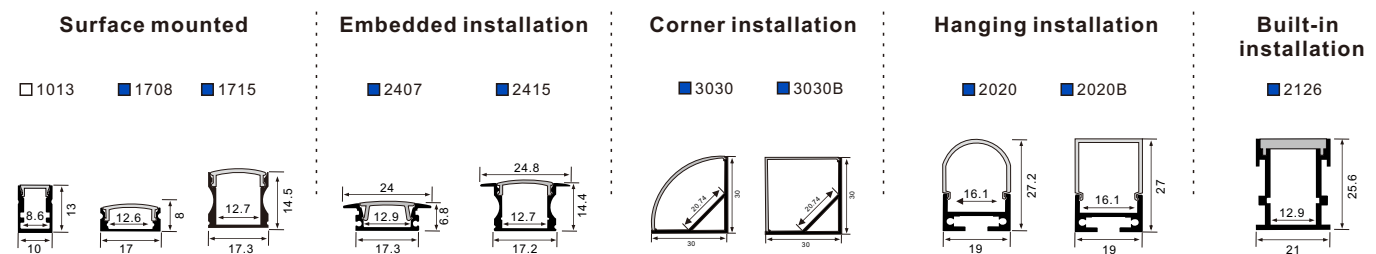

TM512AC RGBW 60 LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

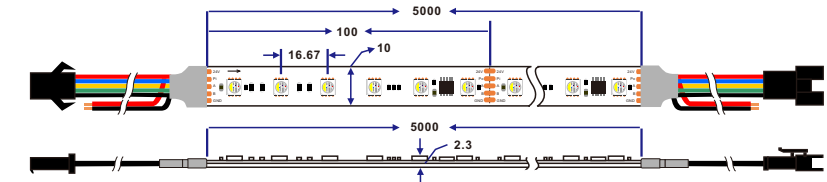


Technical Detail

LED Type	SMD5050 RGBW 4in1 60LED/M
Color	Digital RGBW
IC Type	TM512AC
Pixel per meter	10pixel
Voltage Input	DC24V
Power	19.2W/M 5.85W/ft
Luminous Flux	864lm/M 263lm/ft
PCB Width	10mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

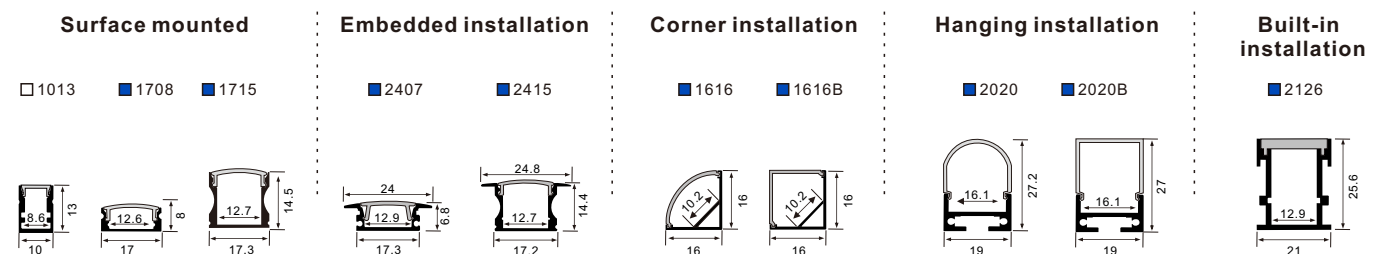

TM512AC4 RGBW 60LEDs/M


- 1. Original brand IC only, 256 gray scales, high brightness, fast data transfer, fast screen refresh, etc.,
- 2. DMX512 digital signal, external IC
- 3. More stable performance in harsh environments



*Please contact our sales for the latest details and certificates



Dimension (mm)

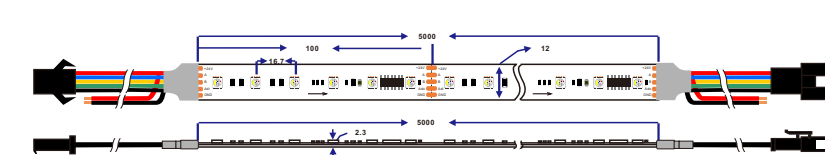


Technical Detail

LED Type	SMD5050 60LED/M
Color	Digital RGBW
IC Type	TM512AC4
Pixel per meter	10pixel
Voltage Input	DC24V
Power	19.2W/M 5.85W/M
Luminous Flux	864lm/M 263lm/ft
PCB Width	12mm
Beam angle	120°
Cutting Unit	100mm

* PCB width, power and lumen can be customized as per your specified demands.

Accessories

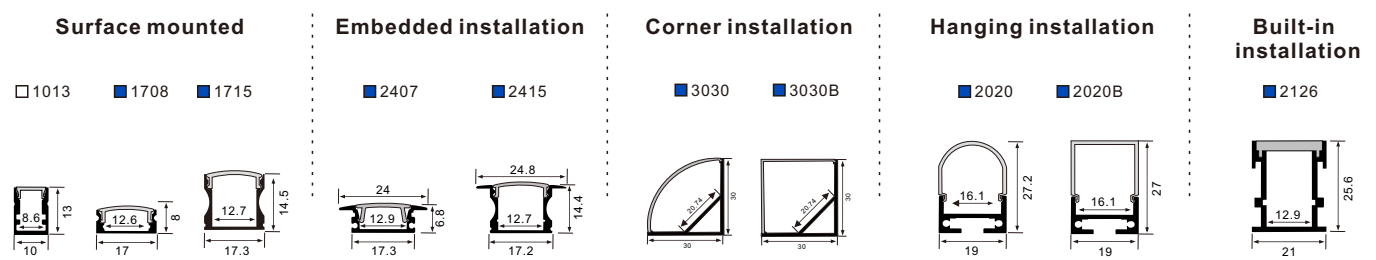

RGBIC LED STRIP LIGHTS



RGB IC



MUSIC



3 M



UNCUTTABLE



DC24V



Pixel RGBW



DMX
Programmable

DMX Signal

IP20



Non-waterproof

IP67




Half silicone tube
with glue filling

IP64



Silicone Coating

IP68



Silicone tube
with glue filling

IP64



Spray thin glue

IP65



Silicone extrusion

IP64



Heat shrinkable sleeve

IP65



Silicone extrusion

IP66




Silicone tube

IP68



Silicone extrusion

PU Flexible LED Wall Washer

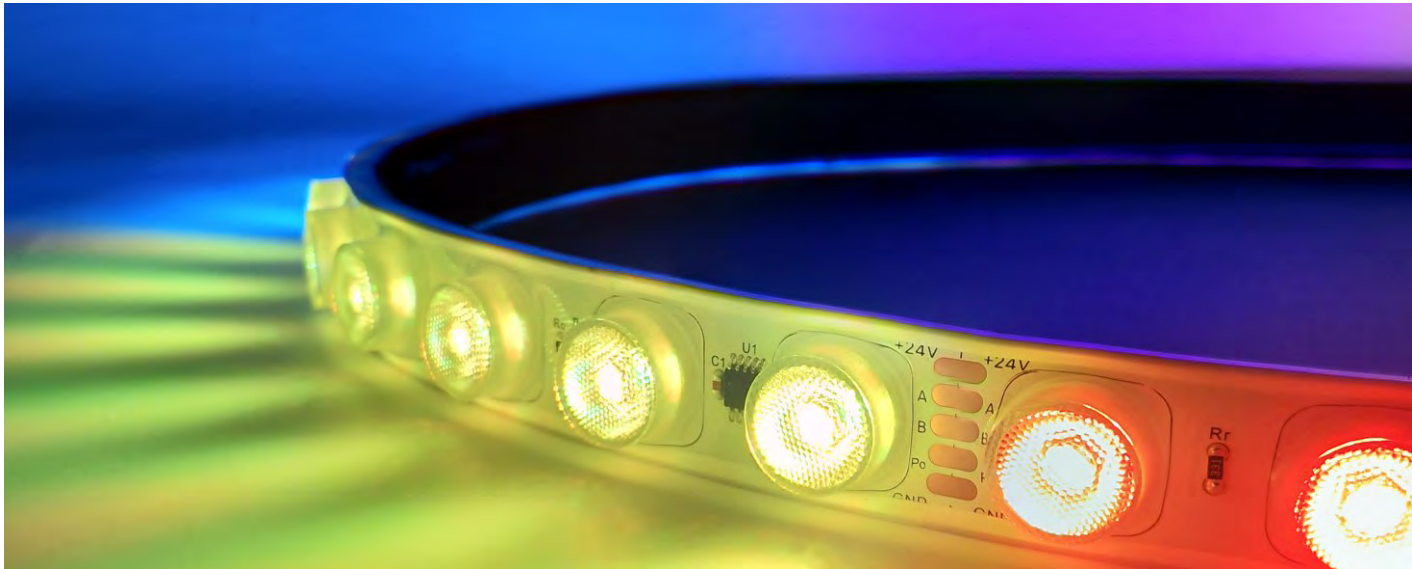

- 1. Flexible design to realize the luminescent effect of bending shape
- 2. True PU glue with higher folding resistance
- 3. Single color, dual white, RGB, RGBW, Pixel RGB, etc.
- 4. Beam Angle: 20°、40°、45°、60°、20*45° etc.




*Please contact our sales for the latest details and certificates



PU Flexible LED Wall Washer

	LED Type	LED QTY	Power	Brightness @4000K Ra90 IP20	Increment	Voltage	Beam Angle (°)	Colors	IP Rating	Dimension
	2835	42LED/M 13LED/ft.	18W/M 5.49W/ft.	1980lm/M 604lm/ft.	166.7mm 6.56in	DC24V	20°/40°/60°/20°45°	White	IP67	L5000*W20.5*H10.4mm L197*W0.8*H0.4in
	2835	44LED/M 13LED/ft.	18W/M 5.49W/ft.	1980lm/M 604lm/ft.	45.5mm 1.79in	DC24V	20°/40°/60°/20°45°	Dual White	IP67	L5000*W20.5*H10.4mm L197*W0.8*H0.4in
	5054 RGB	42LED/M 13LED/ft.	24W/M 7.32W/ft.	1080lm/M 329lm/ft.	166.7mm 6.56in	DC24V	20°/45°/60°/15°45°	RGB	IP67	L5000*W20.5*H12mm L197*W0.8*H0.47in
	5054 RGBW	42LED/M 13LED/ft.	28W/M 8.53W/ft.	1540lm/M 469lm/ft.	166.7mm 6.56in	DC24V	20°/45°/60°/15°45°	RGBW	IP67	L5000*W20.5*H12mm L197*W0.8*H0.47in
	5050 RGB	42LED/M 13LED/ft.	8.5W/M 2.59W/ft.	298lm/M 91lm/ft.	166.7mm 6.56in	DC24V	20°/45°/60°/15°45°	Pixel RGB	IP67	L5000*W20.5*H12mm L197*W0.8*H0.47in


Installation distance/Wall washing height

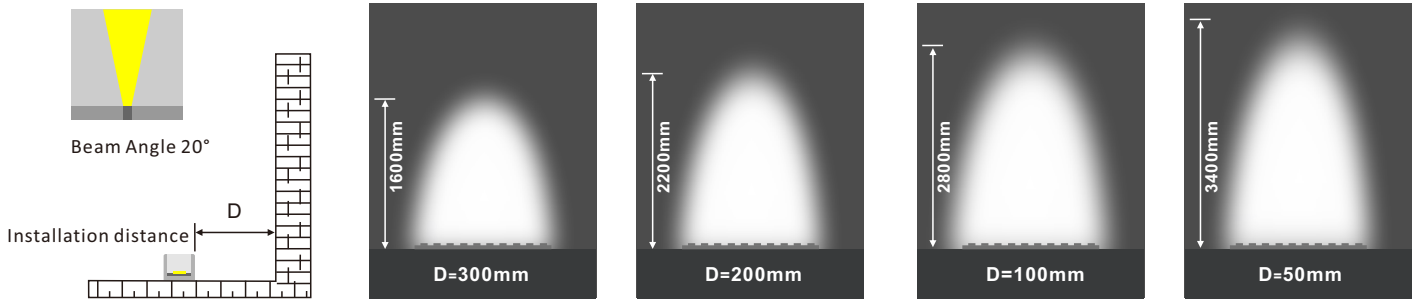

Please contact us if you need data in other beam angle

LED Flexible Wall Wash Light Single Color


- 1.Flexible design to realize the luminescent effect of bending shape
- 2.Higher folding resistance
- 3.High brightness with low light decay
- 4.Beam Angle: 20°, 40°, 60°, etc.

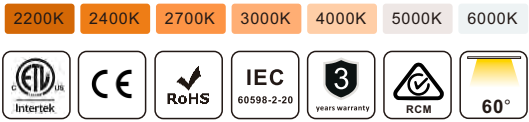

*Please contact our sales for the latest details and certificates



Dimension (mm)

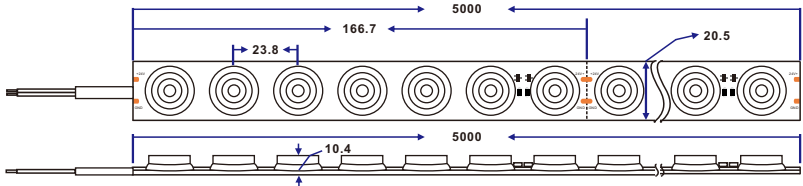


Technical Detail

LED Type	SMD2835 42LED/M
Color	1800K-8000K
CRI	Ra90
IP Grade	IP67
Voltage Input	DC24V
Power	18W/M 5.49W/ft
Luminous Flux	1980lm/M 604lm/ft @4000K
Product Size	20.5x10.4x5000mm
Len angle	20°/40°/60°/20°45°
Cutting Unit	166.7mm

* PCB width, power and lumen can be customized as per your specified demands.

Installation Distance/Wall Sashing Height

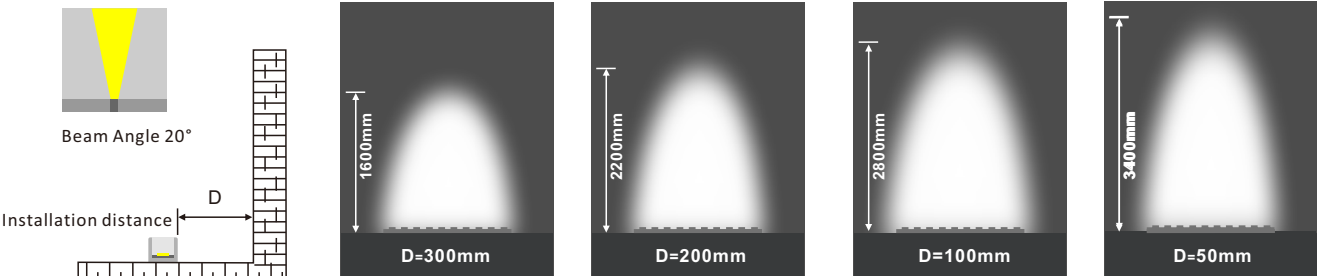

Please contact us if you need data in other beam angle

LED Flexible Wall Wash Light TW Color

- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Higher folding resistance
- 3. CCT adjustable design with CCT range 2700-6500K
- 4. Beam Angle: 20°, 40°, 60°, etc.

2200K

2400K

2700K

3000K

4000K


5000K

6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

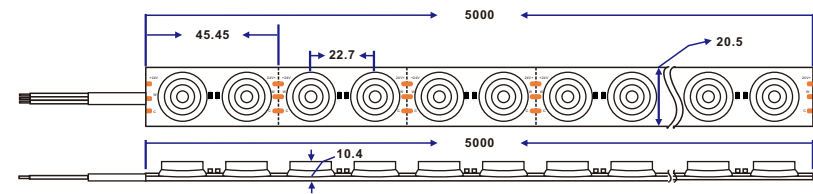


ONE
BIN
ONLY

Technical Detail

LED Type	SMD2835 44LED/M
Color	2700K+6500K
CRI	RA>90
IP Grade	IP67
Voltage Input	DC24V
Power	18W/M 5.49W/ft
Luminous Flux	1980lm/M 604lm/ft @4000K Ra90
Product Size	20.5x10.4x5000mm
Lens Angle	20°/40°/60°/20°45°
Cutting Unit	45.5mm

* PCB width, power and lumen can be customized as per your specified demands.

Installation Distance/Wall Sashing Height

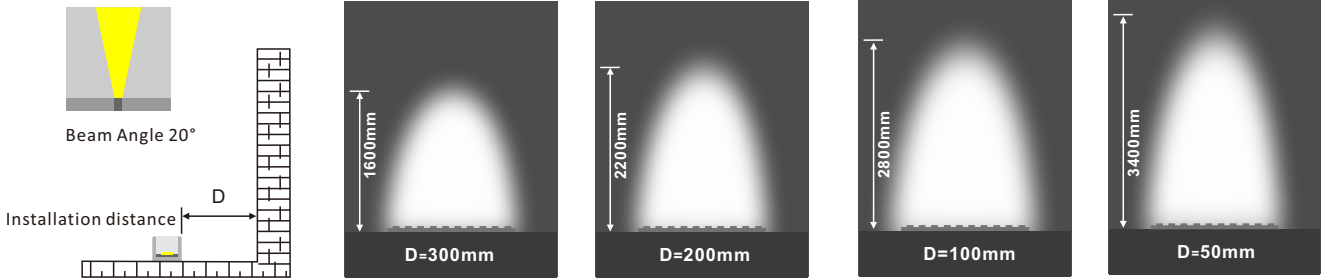


Please contact us if you need data in other beam angle


LED Flexible Wall Wash Light RGB

- 1.Flexible design to realize the luminescent effect of bending shape
- 2.Higher folding resistance
- 3.RGB design for more colors
- 4.Beam Angle: 20°, 45°, 60°,15°45°, etc.

*Please contact our sales for the latest details and certificates

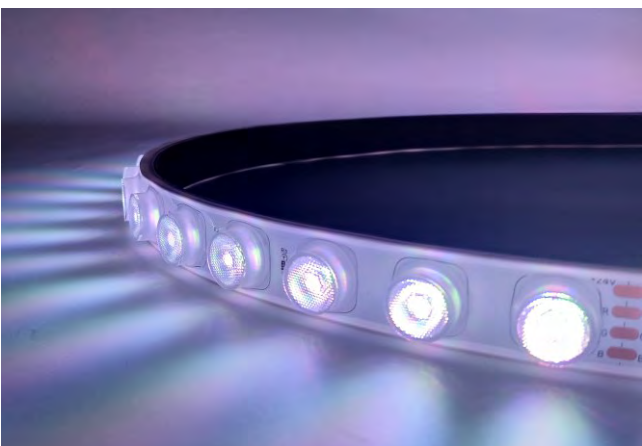

Dimension (mm)

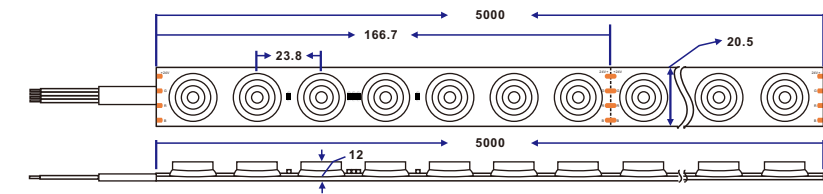


DC24V
RGB

Technical Detail

LED Type	SMD5054 42LED/M
Color	RGB
IP Grade	IP67
Voltage Input	DC24V
Power	24W/M 7.32W/ft
Light Efficiency	45lm/W
Luminous Flux	1080m/M 329lm/ft
Product Size	20.5x12x5000mm
Lens angle	20°/45°/60°/15°45°
Cutting Unit	166.7mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Installation Distance/Wall Sashing Height

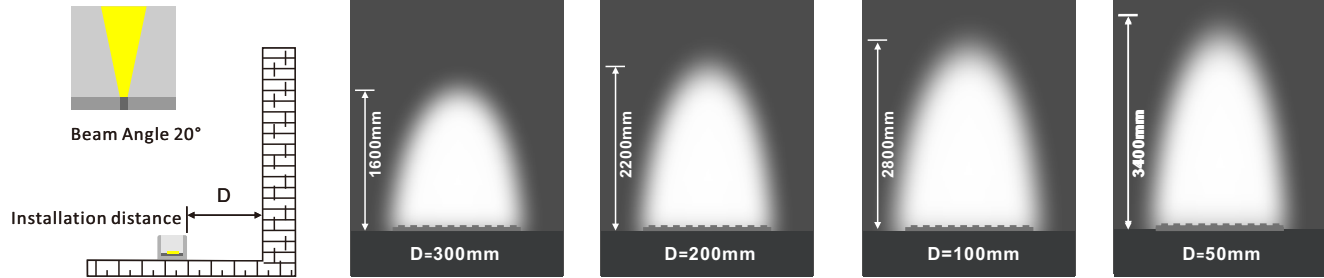

Please contact us if you need data in other beam angle

LED Flexible Wall Wash Light RGBW

- 1.Flexible design to realize the luminescent effect of bending shape
- 2.Higher folding resistance
- 3.RGBW design with more colors
- 4. Beam Angle: 20°, 45°, 60°,15°45°, etc.



*Please contact our sales for the latest details and certificates




Dimension (mm)



Technical Detail	
LED Type	SMD5054 42LED/M
Color	RGBW
IP Grade	IP67
Voltage Input	DC24V
Power	28W/M 8.53W/ft
Light Efficiency	55lm/W
Luminous Flux	1540m/M 469lm/ft
Product Size	20.5X12X5000mm
Lens angle	20°/30°/45°/60°
Cutting Unit	166.7mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Installation Distance/Wall Sashing Height

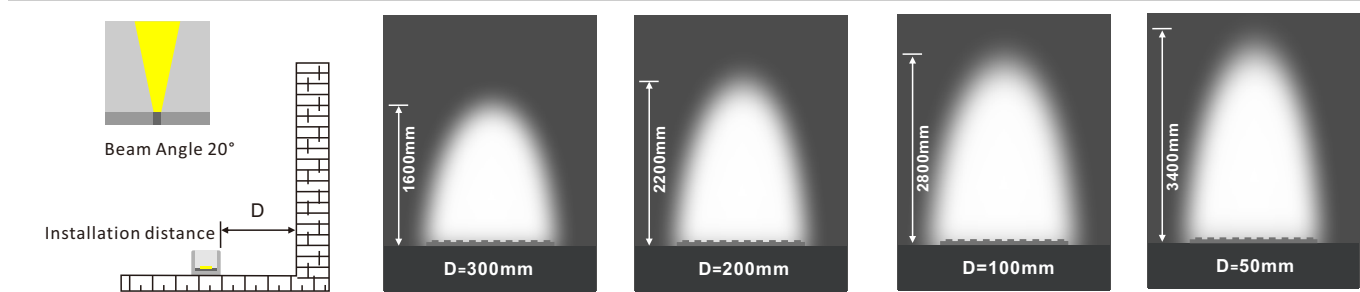

Please contact us if you need data in other beam angle

LED Flexible Wall Wash Light Pixel RGB


- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Higher folding resistance
- 3. Pixel RGB design for magic light effect
- 4. Beam Angle: 20°,30°, 45°,60° etc.



*Please contact our sales for the latest details and certificates




Dimension (mm)

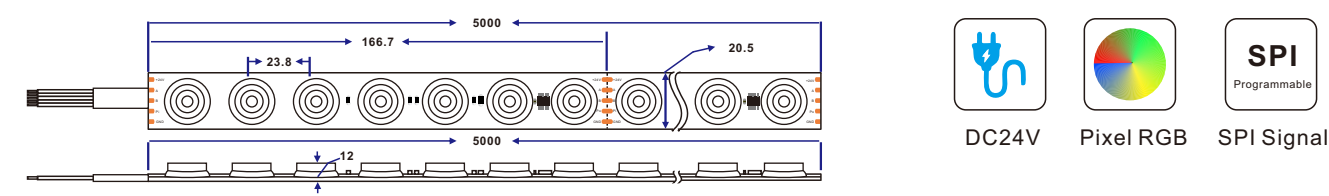

Technical Detail	
LED Type	SMD5050 42LED/M
Color&Pixel	MAGIC RGB SM18512pixel
IP Grade	IP67
Voltage Input	DC24V
Power	8.5W/M 2.59W/ft
Light Efficiency	45lm/W
Luminous Flux	298lm/M 91lm/ft
Product Size	20.5X12X5000mm
Lens angle	20°/30°/45°/60°
Cutting Unit	166.7mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Installation Distance/Wall Sashing Height

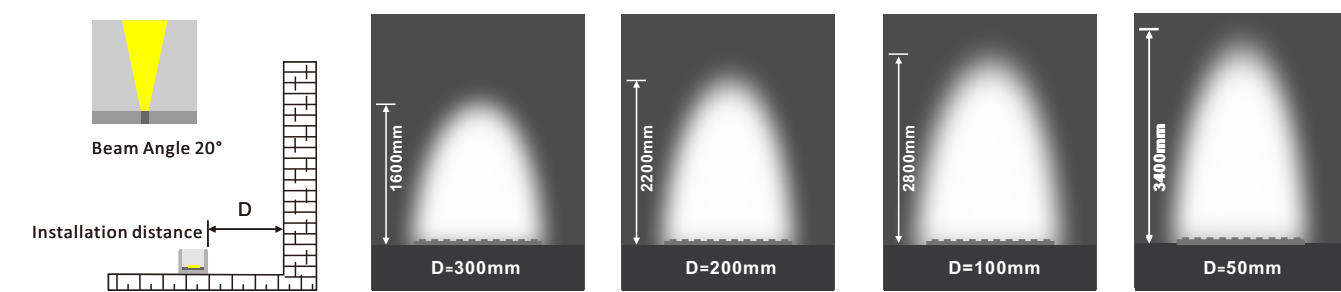


Please contact us if you need data in other beam angle

Neon Flexible LED Wall Washer



- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Resistance to saline solutions, acids&alkali, corrosive gases and uv
- 3. Both top bend and side bend available
- 4. Beam Angle: 30 °

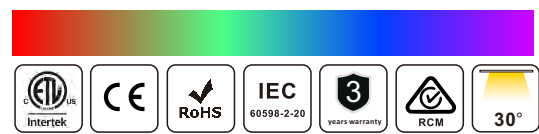






*Please contact our sales for the latest details and certificates



Neon Flexible LED Wall Washer

	LED Type	LED QTY	Power	Brightness @4000K Ra90 IP20	Increment	Voltage	Beam Angle (°)	Colors	IP Rating	Dimension
	2835	48LED/M	18W/M	1980lm/M	41.7mm	DC24V	30°	White	IP67	L5000*W16*H16mm
		15LED/ft.	5.49W/ft.	604lm/ft.	1.64in					L197*W0.63*H0.63in
	3030	48LED/M	24W/M	2640lm/M	41.7mm	DC24V	30°	Dual White	IP67	L5000*W16*H16mm
		15LED/ft.	7.32W/ft.	805lm/ft.	1.64in					L197*W0.63*H0.63in
	3030 RGB	48LED/M	24W/M	1080lm/M	41.7mm	DC24V	30°	RGB	IP67	L5000*W16*H16mm
		15LED/ft.	7.32W/ft.	329lm/ft.	1.64in					L197*W0.63*H0.63in
	5054 RGBW	48LED/M	24W/M	1320lm/M	41.7mm	DC24V	30°	RGBW	IP67	L5000*W24*H24mm
		15LED/ft.	7.32W/ft.	402lm/ft.	1.64in					L197*W0.94*H0.94in


Installation distance/Wall washing height



Please contact us if you need data in other beam angle

Neon LED Flexible Wall Washer 1616 White Color



- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Resistance to saline solutions, acids&alkali, corrosive gases and UV
- 3. Top bend and side bend can meet different application
- 4. Beam Angle: 30°

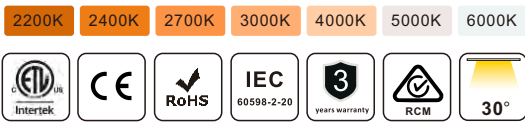

*Please contact our sales for the latest details and certificates




Dimension (mm)

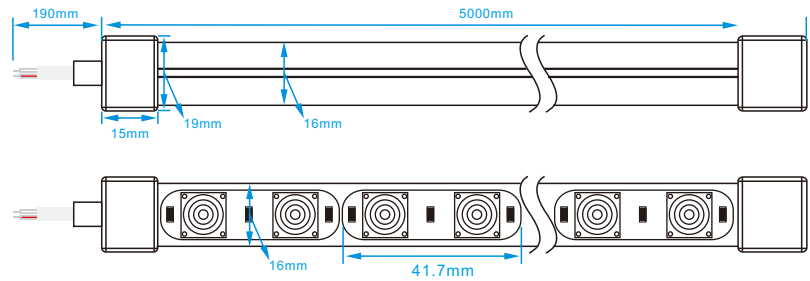

Technical Detail


LED Type	SMD2835 48LED/M
Color	1800K-6500K
CRI	RA>90
IP Grade	IP67
Voltage Input	DC24V
Power	18W/M 5.49W/ft
Luminous Flux	1980lm/M 604lm/ft @4000K
Neon Size	5000x16x16mm
Lens Angle	30°
Cutting Unit	41.7mm

* PCB width, power and lumen can be customized as per your specified demands.

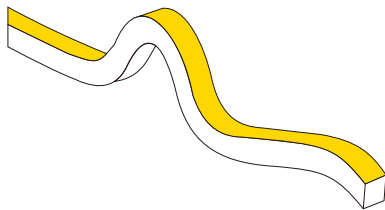


Accessories


End cap with hole




End cap without hole




Clips



Aluminum profile



Flex profile



Neon LED Flexible Wall Washer 1616 Dual Color

- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Resistance to saline solutions, acids&alkali, corrosive gases and UV
- 3. Top bend and side bend can meet different application
- 4. Beam Angle: 30°

2200K

2400K

2700K

3000K

4000K



5000K

6000K

*Please contact our sales for the latest details and certificates




Dimension (mm)

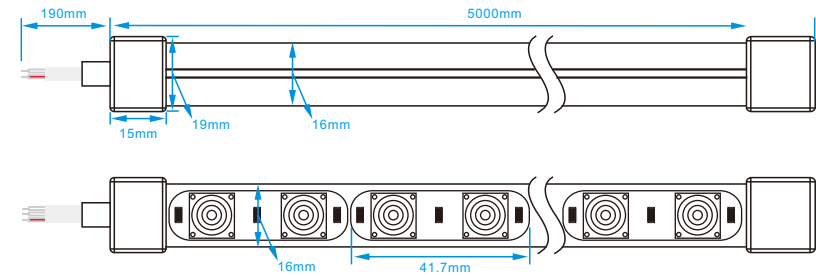

Technical Detail


LED Type	SMD3030 48LED/M
Color	2700K+6500K
CRI	Ra90
Voltage Input	DC24V
Power	24W/M 7.32W/ft
Luminous Efficiency	110lm/W
Luminous Flux	2640lm/M 805lm/ft @4000K Ra90
Product Size	5000X16X16mm
Beam angle	30°
Cutting Unit	41.7mm

* PCB width, power and lumen can be customized as per your specified demands.

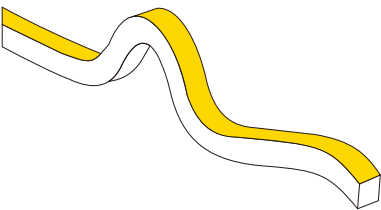


Accessories


End cap with hole




End cap without hole




Clips



Aluminum profile




Flex profile





Neon LED Flexible Wall Washer 1616 RGB Color

- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Resistance to saline solutions, acids&alkali, corrosive gases and UV
- 3. Top bend and side bend can meet different application
- 4. Beam Angle: 30°

*Please contact our sales for the latest details and certificates

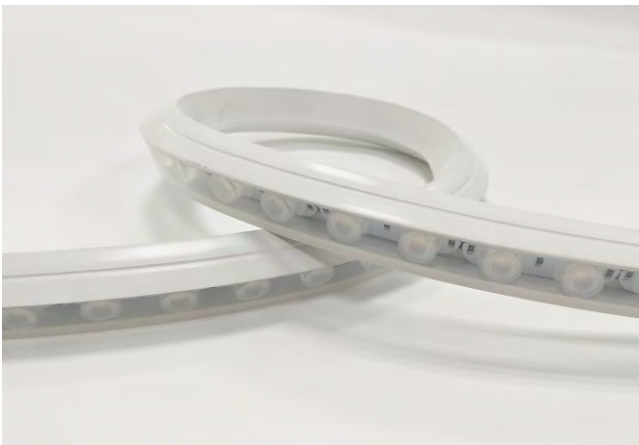


Dimension (mm)

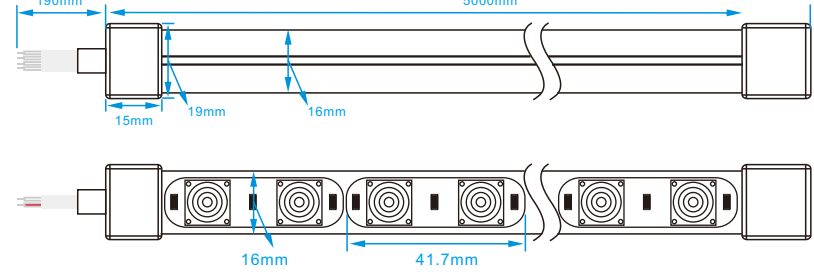

Technical Detail


LED Type	SMD3030 48LED/M
Color	RGB
CRI	/
IP Grade	IP67
Voltage Input	DC24V
Power	24W/M 7.32W/ft
Luminous Flux	1080lm/M 329lm/ft
Neon Size	5000x16x16mm
Lens Angle	30°
Cutting Unit	41.7mm

* PCB width, power and lumen can be customized as per your specified demands.

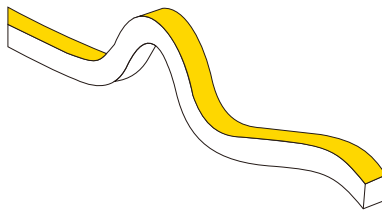


Accessories


End cap with hole




End cap without hole




Clips



Aluminum profile




Flex profile




Neon LED Flexible Wall Washer 2424 RGBW Color



- 1. Flexible design to realize the luminescent effect of bending shape
- 2. Resistance to saline solutions, acids&alkali, corrosive gases and UV
- 3. Top bend and side bend can meet different application
- 4. Beam Angle: 30°

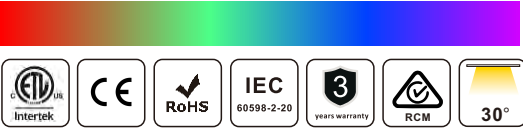

*Please contact our sales for the latest details and certificates

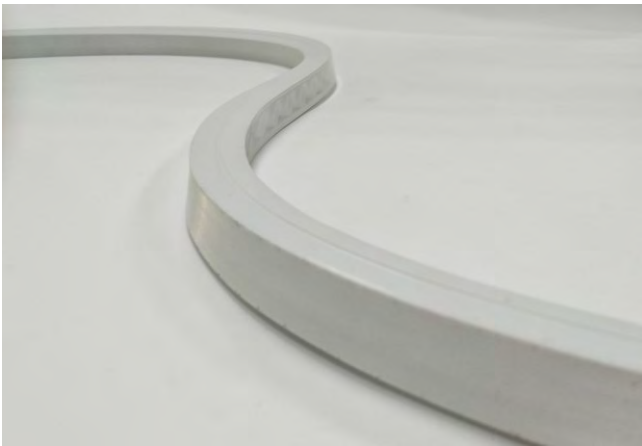


Dimension (mm)

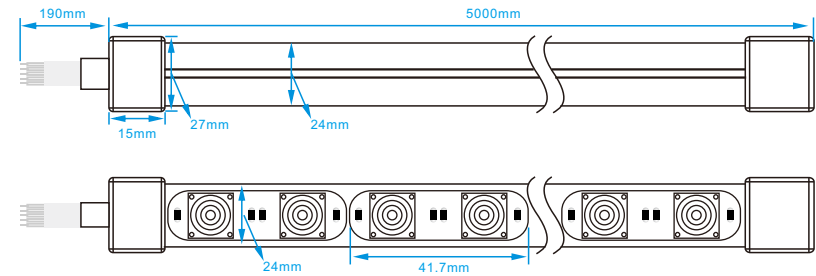

Technical Detail


LED Type	SMD5054 48LED/M
Color	RGBW
IP Grade	IP67
Voltage Input	DC24V
Power	24W/M 7.32W/ft
Light Efficiency	55lm/W
Luminous Flux	1320m/M 402lm/ft
Product Size	24X24X5000mm
Lens angle	30°
Cutting Unit	41.7mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

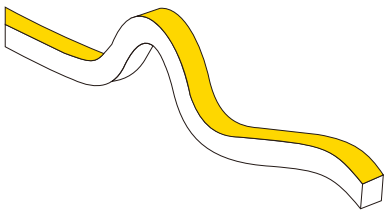


Accessories


End cap with hole




End cap without hole




Clips



Aluminum profile



Flex profile



195lm/W High Efficiency LED Strip



- 1. Ultra high light efficiency, up to 195lm/W
- 2. Complete product series, can meet different application scenarios
- 3. Super bright LED, LM-80, 97.4% lumen remains after 6000H testing
- 4. Use double PCB, made of pure copper, best heat sink

2200K

2400K

2700K

3000K

4000K

5000K

6000K

*Please contact our sales for the latest details and certificates



180lm/W High Efficiency LED Strip



- 1. Ultra high light efficiency, up to 180lm/W
- 2. Complete product series, can meet different application scenarios
- 3. Super bright LED, LM-80, 97.4% lumen remains after 6000H testing
- 4. Use double PCB, made of pure copper, best heat sink

2200K

2400K

2700K

3000K

4000K

5000K

6000K

*Please contact our sales for the latest details and certificates



195lm/W Version

		LED QTY	Power	Brightness @4000K Ra80 IP20	Increment	Voltage	CRI	IP Rating	Dimension @IP20
B	Energy Efficiency Class	64LED/M	8W/M	1560lm/M	125mm	DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
		19LED/ft.	2.44W/ft.	475lm/ft.	4.92in				L197*W0.31in
B	Energy Efficiency Class	80LED/M	8W/M	1560lm/M	100mm	DC12V	80/90/95	IP20/64/66/68	L5000*W8mm
		24LED/ft.	2.44W/ft.	475lm/ft.	3.94in				L197*W0.31in
B	Energy Efficiency Class	128LED/M	14.4W/M	2808lm/M	62.5mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		39LED/ft.	4.39W/ft.	856lm/ft.	2.46in				L197*W0.4in
B	Energy Efficiency Class	160LED/M	16W/M	3120lm/M	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		48LED/ft.	4.88W/ft.	951lm/ft.	1.97in				L197*W0.4in
B	Energy Efficiency Class	192LED/M	20W/M	3900lm/M	41.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		58LED/ft.	6.1W/ft.	1189lm/ft.	1.64in				L197*W0.4in
B	Energy Efficiency Class	240LED/M	22W/M	4290lm/M	33.3mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		73LED/ft.	6.71W/ft.	1308lm/ft.	1.31in				L197*W0.4in
B	Energy Efficiency Class	320LED/M	33W/M	6435lm/M	25mm	DC24V	80/90/95	IP20/64/66/68	L3000*W20mm
		97LED/ft.	10.1W/ft.	1961lm/ft.	0.98in				L118*W0.8in
B	Energy Efficiency Class	480LED/M	45W/M	8775lm/M	50mm	DC24V	80/90/95	IP20/64	L3000*W30mm
		146LED/ft.	13.7W/ft.	2675lm/ft.	1.97in				L118*W1.2in
B	Energy Efficiency Class	560LED/M	55W/M	10725lm/M	71.4mm	DC24V	80/90/95	IP20/64	L3000*W50mm
		170LED/ft.	16.8W/ft.	3269lm/ft.	2.81in				L118*W1.97in

180lm/W Version

		LED QTY	Power	Brightness @4000K Ra80 IP20	Increment	Voltage	CRI	IP Rating	Dimension @IP20
C	Energy Efficiency Class	64LED/M	8W/M	1440lm/M	125mm	DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
		19LED/ft.	2.44W/ft.	439lm/ft.	4.92in				L197*W0.31in
C	Energy Efficiency Class	80LED/M	8W/M	1440lm/M	100mm	DC12V	80/90/95	IP20/64/66/68	L5000*W8mm
		24LED/ft.	2.44W/ft.	439lm/ft.	3.94in				L197*W0.31in
C	Energy Efficiency Class	128LED/M	14.4W/M	2592lm/M	62.5mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		39LED/ft.	4.39W/ft.	790lm/ft.	2.46in				L197*W0.4in
C	Energy Efficiency Class	160LED/M	16W/M	2880lm/M	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		48LED/ft.	4.88W/ft.	878lm/ft.	1.97in				L197*W0.4in
C	Energy Efficiency Class	192LED/M	20W/M	3600lm/M	41.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		58LED/ft.	6.1W/ft.	1097lm/ft.	1.64in				L197*W0.4in
NEW	C	240LED/M	22W/M	3960lm/M	33.3mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
		73LED/ft.	6.71W/ft.	1207lm/ft.	1.31in				L197*W0.4in
NEW	C	320LED/M	33W/M	5940lm/M	25mm	DC24V	80/90/95	IP20/64/66/68	L3000*W20mm
		97LED/ft.	10.1W/ft.	1811lm/ft.	0.98in				L118*W0.8in
NEW	C	480LED/M	45W/M	8100lm/M	50mm	DC24V	80/90/95	IP20/64	L3000*W30mm
		146LED/ft.	13.7W/ft.	2469lm/ft.	1.97in				L118*W1.2in
NEW	C	560LED/M	55W/M	9900lm/M	71.4mm	DC24V	80/90/95	IP20/64	L3000*W50mm
		170LED/ft.	16.8W/ft.	3018lm/ft.	2.81in				L118*W1.97in

High Efficiency 195lm/W 2835 128 LEDs/M

- 1. 8LED/group design, up to 195lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

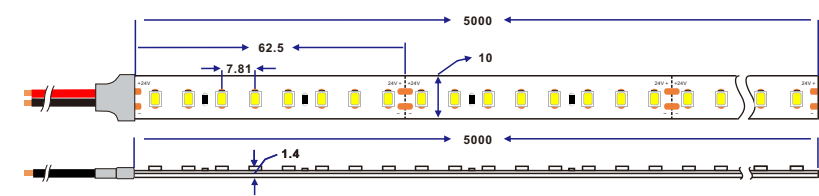


Technical Detail

LED Type	SMD2835 128LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	14.4W/M	4.39W/ft
Light Efficiency	195lm/W @4000K Ra80	
Luminous Flux	2808lm/M	856lm/ft @4000K Ra80
Energy Efficiency Class	B	
Beam angle	120°	
Cutting Unit	62.5mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

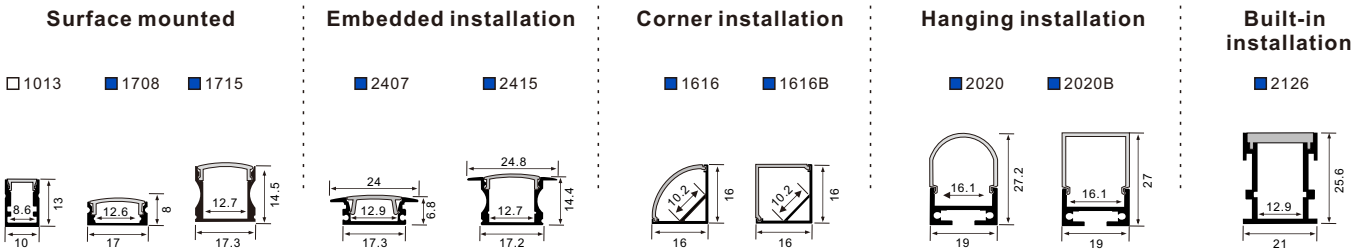

High Efficiency 195lm/W 2835 160 LEDs/M

- 1. 8LED/group design, up to 195lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

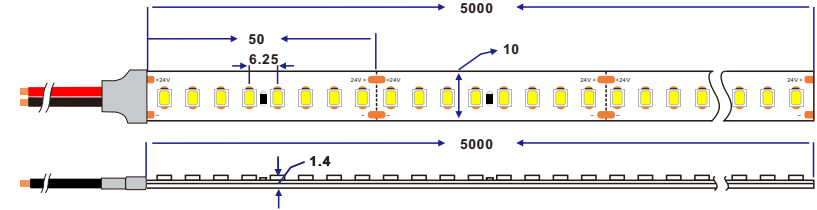


Technical Detail

LED Type	SMD2835 160LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	16W/M	4.88W/ft
Light Efficiency	195lm/W @4000K Ra80	
Luminous Flux	3120lm/M	951lm/ft @4000K Ra80
Energy Efficiency Class	B	
Beam angle	120°	
Cutting Unit	50mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

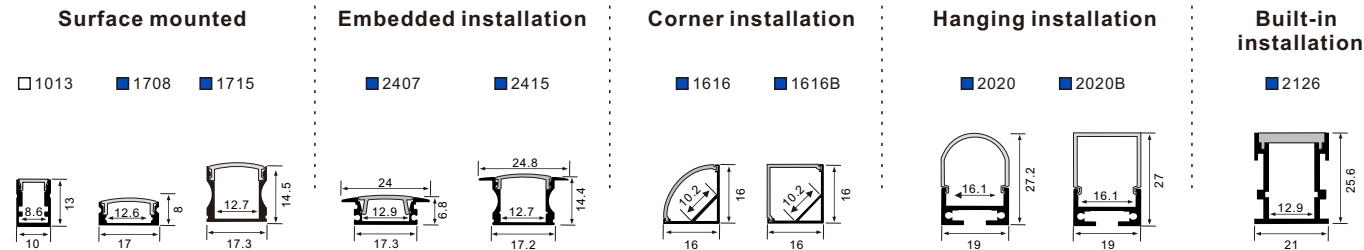

High Efficiency 195lm/W 2835 240 LEDs/M


- 1. 8LED/group design, up to 195lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

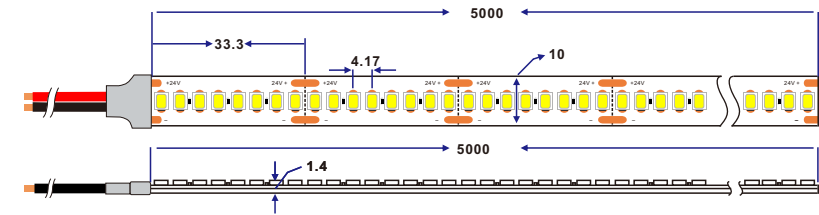

Technical Detail

LED Type	SMD2835 240LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	22W/M	6.71W/ft
Light Efficiency	195lm/W @4000K Ra80	
Luminous Flux	4290lm/M	1308lm/ft @4000K Ra80
Energy Efficiency Class	B	
Beam angle	120°	
Cutting Unit	33.3mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

Embedded installation

Corner installation

Hanging installation

Built-in installation

High Efficiency 195lm/W 2835 480 LEDs/M


- 1. 8LED/group design, up to 195lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

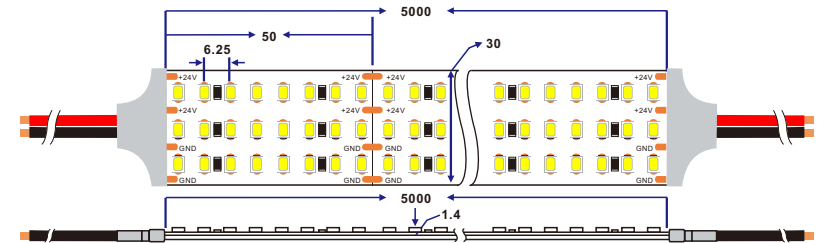

Technical Detail

LED Type	SMD2835 480LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	45W/M	13.7W/ft
Light Efficiency	195lm/W @4000K Ra80	
Luminous Flux	8775lm/M	2675lm/ft @4000K Ra80
Energy Efficiency Class	B	
Beam angle	120°	
Cutting Unit	50mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

Embedded installation

Corner installation

Hanging installation

High Efficiency 195lm/W 2835 560 LEDs/M

- 1. 8LED/group design, up to 195lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K 2400K 2700K 3000K 4000K 5000K 6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

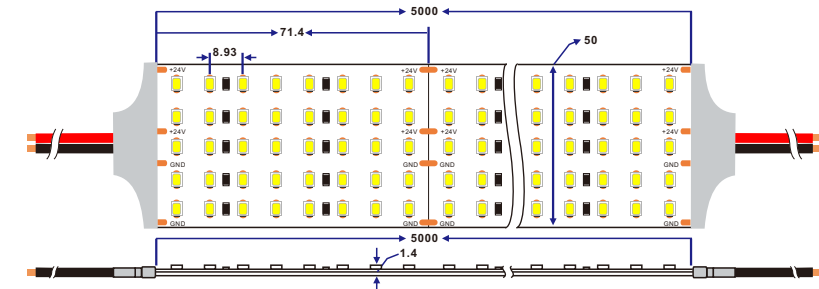

Technical Detail


LED Type	SMD2835 560LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	55W/M 16.8W/ft
Light Efficiency	195lm/W @4000K Ra80
Luminous Flux	10725lm/M 3269lm/ft @4000K Ra80
Energy Efficiency Class	B
Beam angle	120°
Cutting Unit	71.4mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories


Surface mounted

7530



Hanging installation

5532



160lm/W High Efficiency LED Strip



- 1. Ultra high light efficiency, up to 160lm/W
- 2. Complete products series, can meet different application scenarios
- 3. Super bright LED, LM-80, 97.4% lumen remains after 6000H testing
- 4. Use double PCB, made of pure copper, best heat sink

2200K 2400K 2700K 3000K 4000K 5000K 6000K



*Please contact our sales for the latest details and certificates



160lm/W Version

	LED QTY	Power	Brightness @4000K Ra80 IP20	Increment	Voltage	CRI	IP Rating	Dimension @IP20
	64LED/M 19LED/ft.	8W/M 2.44W/ft.	1280lm/M 390lm/ft.	125mm 4.92in	DC24V	80/90/95	IP20/64/66/68	L5000*W8mm L197*W0.31in
	80LED/M 24LED/ft.	8W/M 2.44W/ft.	1280lm/M 390lm/ft.	100mm 3.94in	DC12V	80/90/95	IP20/64/66/68	L5000*W8mm L197*W0.31in
	128LED/M 39LED/ft.	14.4W/M 4.39W/ft.	2304lm/M 702lm/ft.	62.5mm 2.46in	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm L197*W0.4in
	160LED/M 48LED/ft.	16W/M 4.88W/ft.	2560lm/M 780lm/ft.	50mm 1.97in	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm L197*W0.4in
	192LED/M 58LED/ft.	20W/M 6.1W/ft.	3200lm/M 975lm/ft.	41.7mm 1.64in	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm L197*W0.4in
	240LED/M 73LED/ft.	22W/M 6.71W/ft.	3520lm/M 1073lm/ft.	33.3mm 1.31in	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm L197*W0.4in
	320LED/M 97LED/ft.	33W/M 10.1W/ft.	5280lm/M 1609lm/ft.	25mm 0.98in	DC24V	80/90/95	IP20/64/66/68	L3000*W20mm L118*W0.8in
	480LED/M 146LED/ft.	45W/M 13.7W/ft.	7200lm/M 2195lm/ft.	50mm 1.97in	DC24V	80/90/95	IP20/64	L3000*W30mm L118*W1.2in
	560LED/M 170LED/ft.	55W/M 16.8W/ft.	8800lm/M 2682lm/ft.	71.4mm 2.81in	DC24V	80/90/95	IP20/64	L3000*W50mm L118*W1.97in

High Efficiency 160lm/W 2835 128 LEDs/M

- 1. 8LED/group design, up to 160lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

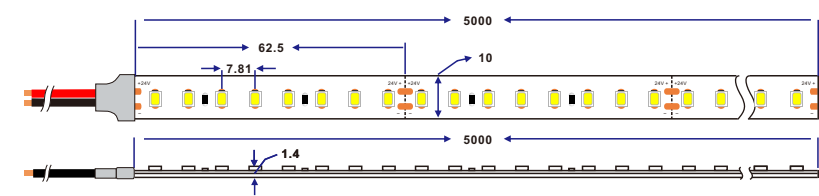


Technical Detail

LED Type	SMD2835 128LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	14.4W/M	4.39W/ft
Light Efficiency	160lm/W @4000K Ra80	
Luminous Flux	2304lm/M	702lm/ft @4000K Ra80
Energy Efficiency Class	C	
Beam angle	120°	
Cutting Unit	62.5mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

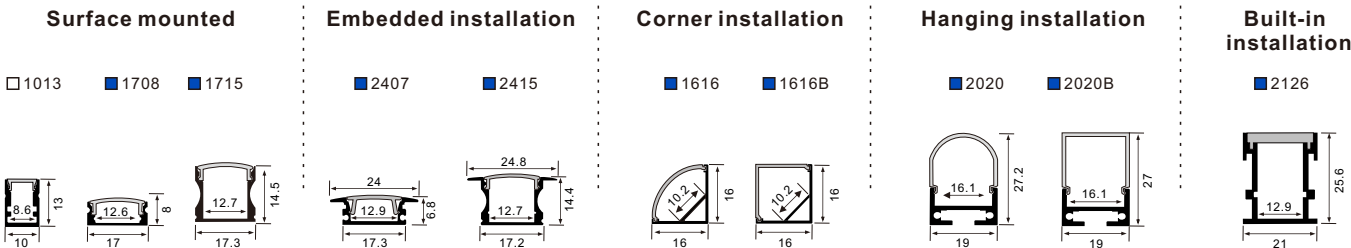

High Efficiency 160lm/W 2835 160 LEDs/M

- 1. 8LED/group design, up to 160lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

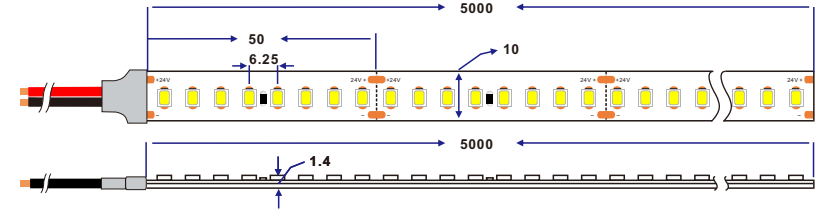


Technical Detail

LED Type	SMD2835 160LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	16W/M	4.88W/ft
Light Efficiency	160lm/W @4000K Ra80	
Luminous Flux	2560lm/M	780lm/ft @4000K Ra80
Energy Efficiency Class	C	
Beam angle	120°	
Cutting Unit	50mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

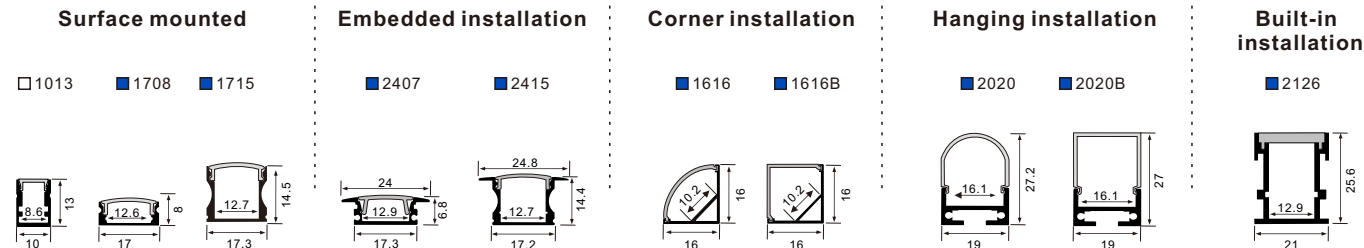

High Efficiency 160lm/W 2835 240 LEDs/M


- 1. 8LED/group design, up to 160lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

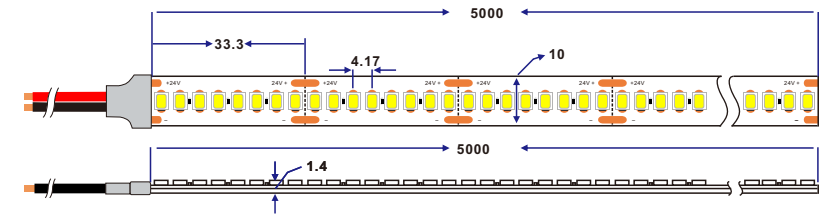

Technical Detail

LED Type	SMD2835 240LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	22W/M	6.72W/ft
Light Efficiency	160lm/W @4000K Ra80	
Luminous Flux	3520lm/M	1073lm/ft @4000K Ra80
Energy Efficiency Class	C	
Beam angle	120°	
Cutting Unit	33.3mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

Embedded installation

Corner installation

Hanging installation


Built-in installation

High Efficiency 160lm/W 2835 480 LEDs/M


- 1. 8LED/group design, up to 160lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates

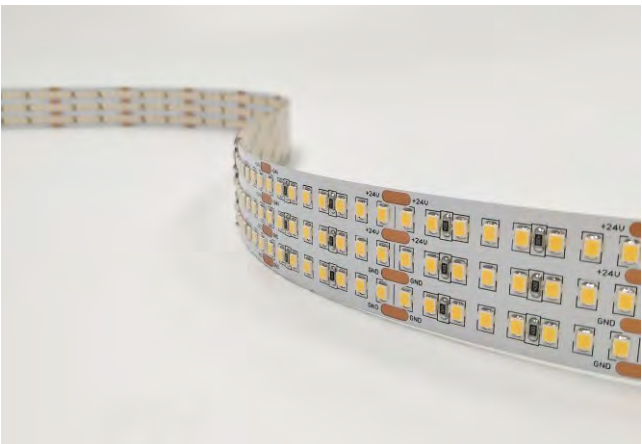

Dimension (mm)

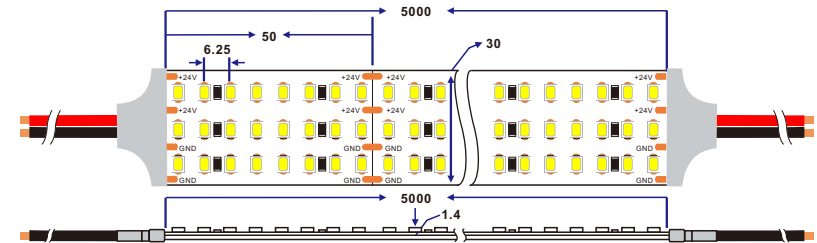

Technical Detail

LED Type	SMD2835 480LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	45W/M	13.7W/ft
Light Efficiency	160lm/W @4000K Ra80	
Luminous Flux	7200lm/M	2195lm/ft @4000K Ra80
Energy Efficiency Class	C	
Beam angle	120°	
Cutting Unit	50mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted

Embedded installation

Corner installation

Hanging installation

High Efficiency 160lm/W 2835 560 LEDs/M

- 1. 8LED/group design, up to 160lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

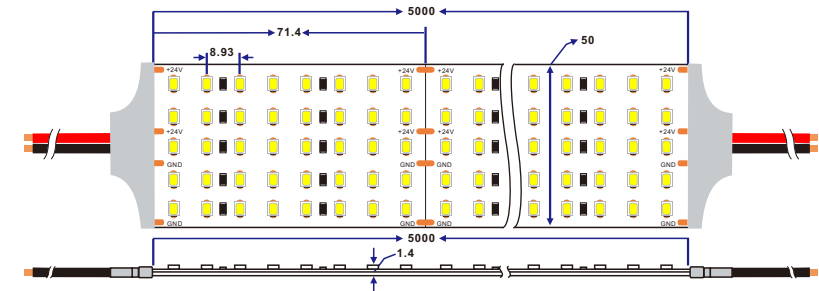



 ONE BIN ONLY

Technical Detail

LED Type	SMD2835 560LED/M	
Color	1800K-8000K	
Color Rendering Index	Ra>80/90/95+	
Voltage Input	DC24V	
Power	55W/M	16.8W/ft
Light Efficiency	160lm/W @4000K Ra80	
Luminous Flux	8800lm/M	2682lm/ft @4000K Ra80
Energy Efficiency Class	C	
Beam angle	120°	
Cutting Unit	71.4mm	

* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories



210lm/W & 145lm/W High Efficiency LED Strip



- 1. Ultra high light efficiency, up to 210lm/W & 145lm/W
- 2. Complete products series, can meet different application scenarios
- 3. Super bright LED, LM-80, 97.4% lumen remains after 6000H testing
- 4. Use double PCB, made of pure copper, best heat sink

2200K2400K2700K3000K4000K5000K6000K




*Please contact our sales for the latest details and certificates



210lm/W Version

	LED QTY	Power	Brightness @4000K Ra80 IP20	Increment	Voltage	CRI	IP Rating	Dimension @IP20
 	90LED/M	4.3W/M	903lm/M	100mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	27LED/ft.	1.31W/ft.	275lm/ft.	3.94in				L197*W0.4in
 	180LED/M	8.6W/M	1806lm/M	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	55LED/ft.	2.62W/ft.	550lm/ft.	1.97in				L197*W0.4in

145lm/W Version

	LED QTY	Power	Brightness @4000K Ra80 IP20	Increment	Voltage	CRI	IP Rating	Dimension @IP20
	70LED/M	12W/M	1740lm/M	100mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	21LED/ft.	3.66W/ft.	530lm/ft.	3.94in				L197*W0.4in
	84LED/M	14W/M	2030lm/M	83.3mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	25LED/ft.	4.27W/ft.	619lm/ft.	3.28in				L197*W0.4in
	140LED/M	16W/M	2320lm/M	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	42LED/ft.	4.88W/ft.	707lm/ft.	1.97in				L197*W0.4in
	182LED/M	18W/M	2610lm/M	38.5mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	55LED/ft.	5.49W/ft.	795lm/ft.	1.51in				L197*W0.4in
 	224LED/M	20W/M	2900lm/M	31.3mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
	68LED/ft.	6.1W/ft.	884lm/ft.	1.23in				L197*W0.4in
 	280LED/M	28.8W/M	4176lm/M	50mm	DC24V	80/90/95	IP20/64	L5000*W20mm
	85LED/ft.	8.78W/ft.	1273lm/ft.	1.97in				L197*W0.8in
 	294LED/M	33W/M	4785lm/M	71.4mm	DC24V	80/90/95	IP20/64	L5000*W20mm
	89LED/ft.	10.1W/ft.	1458lm/ft.	2.81in				L197*W0.8in

High Efficiency 210lm/W 2835 90 LEDs/M

- 1. 9LED/group design, up to 210lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

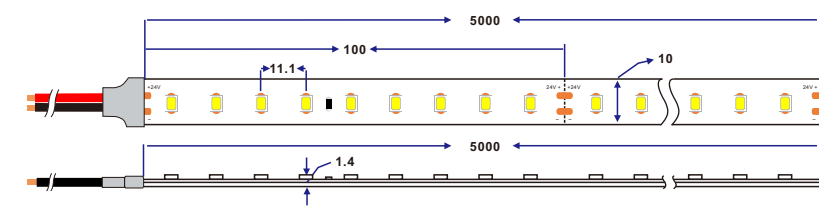

Technical Detail

LED Type	SMD2835 90LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	4.3W/M 1.31W/ft
Light Efficiency	210lm/W @4000K Ra80
Luminous Flux	903lm/M 275lm/ft @4000K Ra80
Energy Efficiency Class	A
Beam angle	120°
Cutting Unit	100mm



* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted
□1013 ■1708 ■1715


Embedded installation
■2407 ■2415


Corner installation
■1616 ■1616B


Hanging installation
■2020 ■2020B


Built-in installation
■2126


High Efficiency 210lm/W 2835 180 LEDs/M

- 1. 9LED/group design, up to 210lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

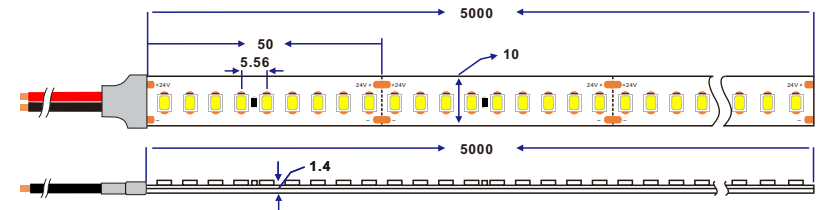

Technical Detail

LED Type	SMD2835 180LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	8.6W/M 2.62W/ft
Light Efficiency	210lm/W @4000K Ra80
Luminous Flux	1806lm/M 550lm/ft @4000K Ra80
Energy Efficiency Class	A
Beam angle	120°
Cutting Unit	50mm



* PCB width, CRI, power and lumen can be customized as per your specified demands.

Accessories

Surface mounted
□1013 ■1708 ■1715


Embedded installation
■2407 ■2415


Corner installation
■1616 ■1616B


Hanging installation
■2020 ■2020B


Built-in installation
■2126


High Efficiency 145lm/W 2835 70 LEDs/M


- 1. 7LED/group design, up to 145lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

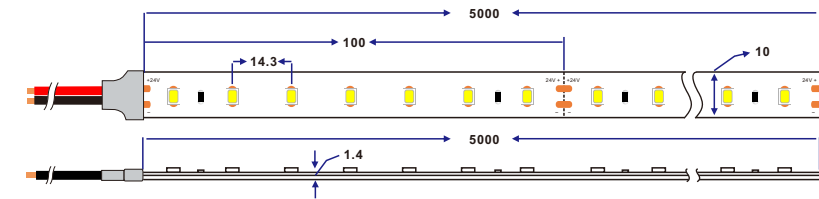

Technical Detail

LED Type	SMD2835 70LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	12W/M 3.66W/ft
Light Efficiency	145lm/W @4000K Ra90
Luminous Flux	1740lm/M 530lm/ft @4000K Ra90
Energy Efficiency Class	D
Beam angle	120°
Cutting Unit	100mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

IP20Non-waterproof

IP64Silicone Coating

IP64Spray thin glue

IP64Heat shrinkable sleeve

IP66Silicone tube

IP67Half silicone tube with glue filling

IP68Silicone tube with glue filling

IP65Silicone extrusion

IP65Silicone extrusion

IP68Silicone extrusion

High Efficiency 145lm/W 2835 140 LEDs/M


- 1. 7LED/group design, up to 145lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors

2200K2400K2700K3000K4000K5000K6000K

*Please contact our sales for the latest details and certificates



Dimension (mm)

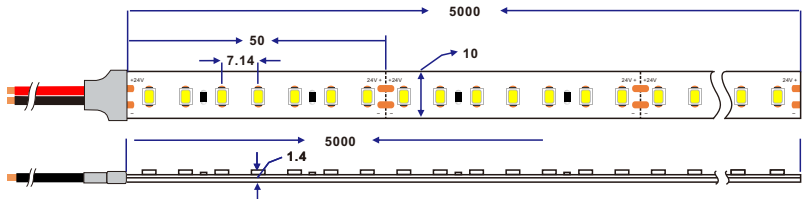

Technical Detail

LED Type	SMD2835 140LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	16W/M 4.88W/ft
Light Efficiency	145lm/W @4000K Ra90
Luminous Flux	2320lm/M 707lm/ft @4000K Ra90
Energy Efficiency Class	D
Beam angle	120°
Cutting Unit	50mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

IP20Non-waterproof

IP64Silicone Coating

IP64Spray thin glue

IP64Heat shrinkable sleeve

IP66Silicone tube

IP67Half silicone tube with glue filling

IP68Silicone tube with glue filling

IP65Silicone extrusion

IP65Silicone extrusion

IP68Silicone extrusion

Accessories

Surface mounted

101317081715

Embedded installation

24072415

Corner installation

16161616B

Hanging installation

20202020B

Built-in installation

2126

Accessories

Surface mounted

101317081715

Embedded installation

24072415

Corner installation

16161616B

Hanging installation

20202020B

Built-in installation

2126

High Efficiency 145lm/W 2835 294 LEDs/M

- 1. 7LED/group design, up to 145lm/W
- 2. High brightness, efficiency, luminous flux per meter
- 3. Cuttable and re-connectable with various connectors


2200K2400K2700K3000K4000K5000K6000K



*Please contact our sales for the latest details and certificates



Dimension (mm)

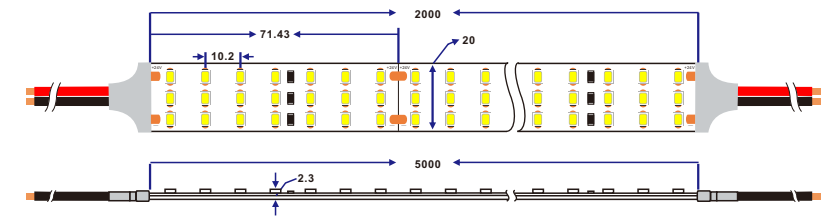

ONE BIN ONLY

Technical Detail

LED Type	SMD2835 294LED/M
Color	1800K-8000K
Color Rendering Index	Ra>80/90/95+
Voltage Input	DC24V
Power	33W/M 10.1W/ft
Light Efficiency	145lm/W @4000K Ra80
Luminous Flux	4785lm/M 1458lm/ft @4000K Ra80
Energy Efficiency Class	D
Beam angle	120°
Cutting Unit	71.43mm

* PCB width, CRI, power and lumen can be customized as per your specified demands.

■ IP20



Non-waterproof

□ IP67



Half silicone tube with glue filling

■ IP64



Silicone Coating

□ IP68



Silicone tube with glue filling

■ IP64



Spray thin glue

□ IP65



Silicone extrusion

■ IP64



Heat shrinkable sleeve

□ IP65



Silicone extrusion

□ IP66



Silicone tube

□ IP68




Silicone extrusion

Accessories

Surface mounted


■ 5035



Embedded installation

■ 3010


■ 3020



Corner installation

■ 3030

■ 3030B



Hanging installation

■ 2626

■ 4542

■ 2626

